
A Database Publication

ATARI USER

Vol. 1 No. 3 July 1985 £1

Discover the secrets of your favourite games with our Atari Disassembler

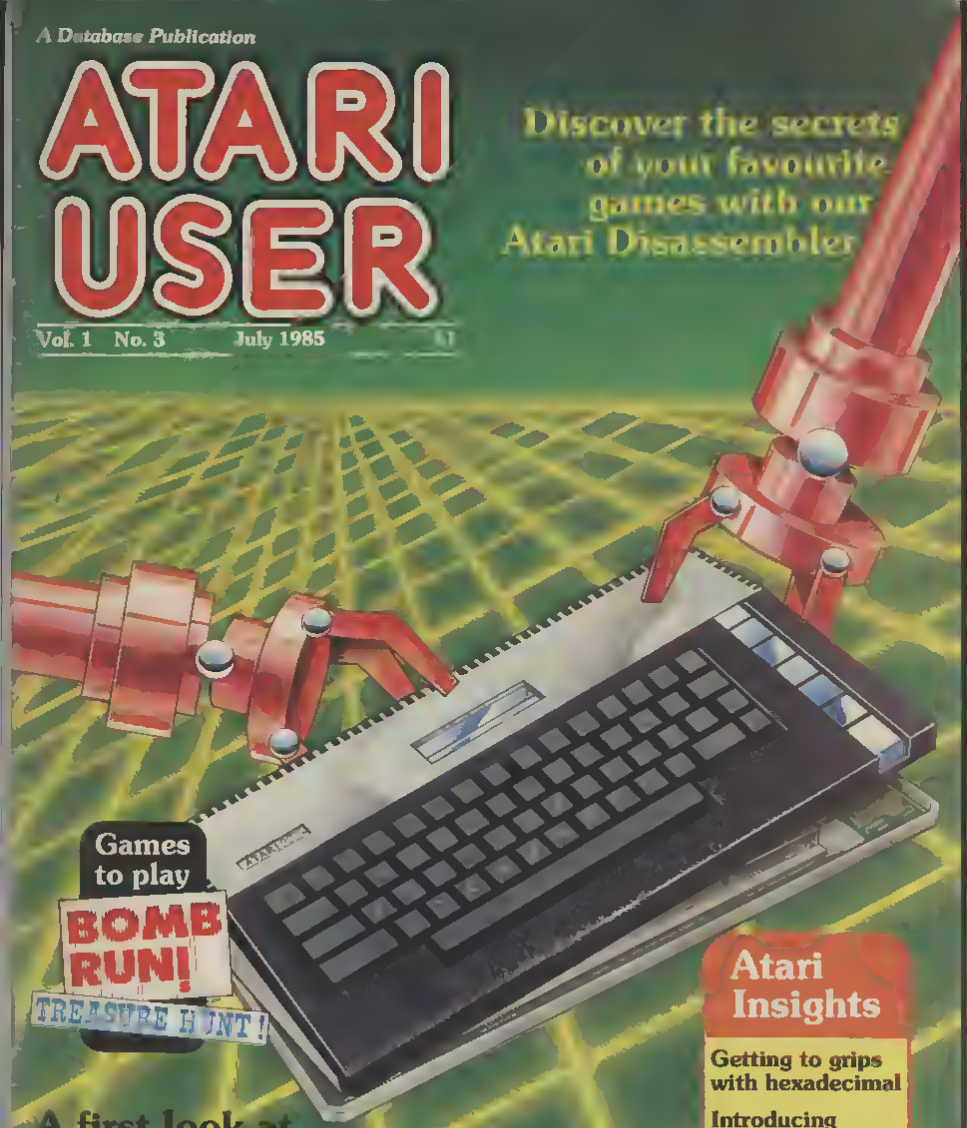

Games to play

BOMB RUN!

TREASURE HUNT!

Atari Insights

Getting to grips with hexadecimal

Introducing string variables

Redefining characters


A first look at Atari DOS 2.5

Great new series starts:

How to produce spectacular graphics displays

WELC
TO ATAR
MAGA

(IF YOU'RE NOT YET AN



Pack 1
800XL 1050 Disk Drive
Home Filing Manager The Payoff
Demonstration Software £259.95 (Normal cost £364.95)

The only way to make full use of ATARI USER is to become one. And the easiest way to do that is with ATARI Personal Computer Packs.

There isn't a better way to get into computers. There isn't a more comprehensive starter pack. Only ATARI could give you a 64 Ram memory, cassette 'soundthrough' capabilities, a maximum of 256 colours on the screen at one time and 4 'sound' voices.

ATARI 800XL PERSO

COME
RI USER
AZINE.

ATARI USER, STOP HERE.)


A choice of a 1050 Disk Drive or a 1010 Cassette Programmer Recorder and additional software

No one else could offer you all this power at these prices.

And, as everything comes together you can make the most of the unbeatable ATARI 800XL straight away

Without doubt, ATARI Personal Computer Packs are the easiest way to get into computers

The only difficulty is deciding which one. Now read on



Pack [illegible] 800XL
1L [illegible] Personal Computer
[illegible] Programming Made Easier
Communicator [illegible] £109.90 (No mail order £194.9b)

) NAL COMPUTER PACKS



Vol 1 No 3 July 1985

Managing Editor **Derek Meakin**
Features Editors **Cliff McKnight**
Mike Bibby
Editorial Team **Alan McLachlan**
Kevin Edwards
Pete Bibby
Production Editor **Peter Glover**
Layout Design **Heather Sheldrick**
News editor **Mike Cowley**
Advertisement Manager **John Riding**
Advertising Sales **John Snowden**
Editor in Chief **Peter Brameld**

Editorial 061 456 8835
Administration 061 456 8383
Advertising 061 456 8500
Subscriptions 061-480 0173
Telex 667664 SHARET G
Prestel Mailbox 614568383

Published by
Database Publications Ltd,
Europa House, 68 Chester Road,
Hazel Grove, Stockport SK7 5NY

Subscription rates for
12 issues, post free
£12 — UK
£15 — Eire (Sterling only)
£20 — Rest of world (surface)
£40 — Rest of world (airmail)

ABC Member of Audit Bureau of Circulations

"Atari User welcomes program listings and articles for publication Material should be typed or computer printed and preferably double-spaced Program listings should be accompanied by cassette tape or disc Please enclose a stamped self addressed envelope otherwise the return of material cannot be guaranteed Contributions accepted for publication by Database Publications Ltd will be on an all rights basis

© 1985 Database Publications Ltd No material may be reproduced in whole or in part without written permission While every care is taken the publishers cannot be held legally responsible for any errors in articles listings or advertisements

Atari User is an independent publication and Atari Corp (UK) Ltd are not responsible for any of the articles in this issue or for any of the opinions expressed

News trade distribution
Europress Sales and Distribution Limited 11 Brighton Road Crawley West Sussex RH10 8AF Tel 0293 27053

News 7
All the latest in Atari news The demise of the 130ST the ST software promise and lots more

Beginners 10
Mike Bibby continues his series with a look at strings and string variables – knotty stuff

Adventuring 14
Brillig takes a trip to the Emerald Isle and solves a Murder on the Zinderneuf There's an answer to the Filthy Fifteen and a new brain-bender to keep you busy

Software 17
This month our intrepid reviewers keep their brains busy with MULE and Pensate and their joysticks busy with Hard Hat Mack Bounty Bob Strikes Back and Kissin Kousins


Graphics 20
Dave Russell gets rid of unwanted hearts in Modes 1 and 2

Display Lists 24
The start of a new series in which Mike Rowe explains how to produce spectacular graphics

Contents


Disassembler
If you want to see what s happening deep inside your Atari, Kevin Edwards disassembler will show you — 28

Utility
Speed up the Atari s power function with Frank O Dwyer s routines — 44



Bit Wise
Mike Bibby takes the mystery out of nybbles and bytes — 46

A golden oldie from the fertile pen of Roland Waddilove Go into action with trigger happy race against time — 32




17 Commandments
If you re thinking of writing for Atari User you ll need to read this — 36

TREASURE HUNT!
Find the treasure but avoid the bombs in Mike Rowe s game You ll need a bit of logic and a bit of luck as well



48



Sounds
Convert your Qwerty key board into a simple organ keyboard with this easy-to-enter routine — 38

Mailbag
Enter your name here by writing to us with all your questions, answers and general comments — 57

DOS
Atari s new DOS 2 5 gets the thumbs up from Andre Willey — 39

Microscope
Take a close look at this password generator – then use it to beat the hackers — 42

Order Form
Binders for your back issues disc doublers dust covers for your micro and a free T-shirt for all new subscribers — 60

ATARI®
ZOOMSOFT

SOFTWARE SPECIALIST

ARCADE	cart
Pacman	9.95
Pango	9.95
Jungle Hunt	9.95
Centipede	9.95
Donkey Kong Junior	14.95
Ms Pacman	14.95
Robotron	14.95
Joust	14.95
Dig Dug	14.95
Jawbreaker	14.95
Miner 2049er	9.95
Oil's Well	14.95
BC's Quest for Tyres	14.95
Bounty Bob Strikes Back	49.95

	cass	disk
Ghostbusters	N/A	14.95
Drop Zone	9.95	12.95
F-15 Strike Eagle	12.95	12.95
Sale Flight	12.95	12.95
Nato Commander	9.45	11.45
Spitfire Ace	9.45	11.45
Bruce Lee	12.50	12.50
Slap Max	9.45	N/A
Conan the Barbarian	N/A	14.95
Fort Apocalypse	9.45	N/A
Snokie	9.45	N/A
Computer War	9.45	N/A
Encounter	9.45	11.45
Mr Robot	N/A	14.95
Oil's Well	14.95	14.95
BC's Quest for Tyres	14.95	14.95
Boulder Dash	14.95	15.95
Bandits	N/A	17.95
Attack of the Mutant Camels	9.95	N/A
Shadow World	9.45	11.45
Slime	9.45	11.45
Chum Jumper	9.95	12.95
Pitfall II	9.95	N/A
Orcal Nim	9.95	N/A
Space Shuttle	9.95	N/A
Mr Dig	9.50	N/A
Dig Dug	9.95	14.95
Pole Position	9.95	14.95
Tale of Beta Lyrae	N/A	14.95
Lode Runner	N/A	28.95
Summer Games	N/A	32.95
Ord	N/A	31.95

ADVENTURES	cass	disk
Cutthroats	N/A	32.50
Hitch Hikers Guide	N/A	32.50
Suspect	N/A	39.95
Deadline	N/A	43.95
Enchanter	N/A	43.95
Infidel	N/A	43.95
Planetfall	N/A	43.50
Seastalker	N/A	39.95
Sorcerer	N/A	43.95
Starcross	N/A	39.95
Suspended	N/A	43.95
Witness	N/A	43.95
Zork I	N/A	35.15
Zork II	N/A	35.15
Zork III	N/A	35.15
Ultima III	N/A	43.95
Dark Crystal	N/A	29.95
Mission Asteroid	N/A	19.95
Ultima II	N/A	39.95
Snowball	9.95	N/A
Return to Eden	9.95	N/A
Colossal Adventure	9.95	N/A
Adventure Quest	9.95	N/A
The Return of Hercules	N/A	29.95
Mask of the Sun	N/A	32.95
Blade of Blackpool	N/A	19.95
The Institute	N/A	29.95
Asylum	N/A	29.95

SIMULATIONS		
50 Mission Crush	N/A	36.95
Battle of Shiloh	N/A	36.95
Breakshire	N/A	36.95
Carrier Force	N/A	52.95
Computer Ambush	N/A	54.95
Conflict Europe II	N/A	36.95
Cytron Masters	N/A	36.95
Fighter	N/A	36.95
Fortress	N/A	31.95
Kasia West	N/A	36.95
Kolonya 88	N/A	53.95
The Cosmic Balance	N/A	36.95
War in Russia	N/A	71.95
Combat Leader	14.95	14.95
Tigers in the Snow	14.95	14.95
Battle for Normandy	14.95	14.95
Knights of the Desert	14.95	14.95
Flight Simulator II	N/A	41.95
Night Mission Pinball	N/A	27.95
Colossal Chess 3.0	14.95	17.95
Castle Wolfenstein	N/A	29.95
Miltimaire	N/A	45.95
Tycoon	N/A	46.95

UTILITIES	cass	disk
Graphics Arts Department	N/A	29.95
Arcade Constructor Set	N/A	29.95
MMG Basic Compiler	N/A	59.95
Basic Debugger	N/A	29.95
Basic Commander	N/A	29.95
Disk Collector	N/A	9.95
Music Box	N/A	35.95
Sparta Dos	N/A	39.95
Music Composer	cart	22.95
Dancing Feets	N/A	29.95
DATA Perfect	N/A	99.95
Letter Perfect	N/A	89.95
Net Worth	N/A	74.95
Visicalc	N/A	49.95
Ran for the Money	N/A	39.95
Homeward	N/A	54.95
Songwriter	N/A	40.95
Basic XL	cart	79.95
Action	cart	79.95
Mac 65 (with OS+A)	N/A	97.95
Mac 65	cart	79.95
Mac 65 Toolkit	N/A	59.95
Action Toolkit	N/A	39.95
S.A.M. (Speech)	N/A	41.95
Tektel	N/A	31.95
FM Animator	N/A	29.95
Atari Writer	cart	39.95
Microsoft Basic 2	cart	49.95
Assembler Editor	cart	22.95
Data Manager	N/A	39.95
Logo + Manuals	cart	59.95
Macro Assembler	N/A	19.95
Home File Manager	N/A	24.95
Touch Typing	12.95	N/A
ACE enhancer	7.95	N/A
Master Type	N/A	36.95
Bank Street Writer	N/A	82.95
The Home Accountant	N/A	64.95

HARDWARE	
Atari 800XL	199.95
1010 Recorder	54.00
Atari 800XL/1010 Recorder	127.95
Atari 800XL/1050 Disk Drive + software	247.95
U.S. Doubler	79.95
The Protect	9.95
Koala Pad	79.95
Touch Tablet	49.95
Track Ball	19.95

Atari is a trademark of Atari Corporation

ATARI PROGRAMMERS
Original games and utility programs wanted for the Atari home computer. Top royalties paid. We can distribute your software world wide. For further information please write or telephone.
C.O.D. service available

Trade Enquiries Welcome

Post To ZOOMSOFT, 46 Hunts worth Mews, London NW1 Tel 01-723 0562

QUANTITY	ITEM	PRICE
		TOTAL

FREE CATALOGUE TICK BOX ☐ I enclose cheque/P.O. for £

Name

Address

AU7



'We will definitely be bringing out a machine priced between £400 and £500' – Atari sales and marketing chief Rob Harding

Atari kills off the 130 ST

Replacement will be more sophisticated

THE 130ST is dead. Atari has confirmed that its eagerly-awaited medium price personal computer will not be manufactured after all.

But there IS to be an ST based machine in the same £400 to £500 range and it WILL be available in the autumn.

It's true we have scrapped the 130ST' sales and marketing boss Rob Harding told *Atari User* but we regard this as a positive move not a backward one.

Quite frankly the 130ST as originally planned – a naked CPU with 128k RAM – would not have been sufficiently superior to other machines in its price range.

Jack Tramiel's philosophy is power without the price which has been achieved with the 520ST – but the 130ST would have fallen short of this high standard so it had to go.

'But we will definitely be bringing out a machine – priced between £400 and £500.

'It will be ST-based but a much more sophisticated product than the 130ST with more memory and possibly even a disc drive.

'I'm confident we'll have supplies ready in the autumn to take on the QL and the new BBC B+.

News of the new machine brought a delighted response from recently-appointed Atari official distributor Silica Shop.

'We went to the Hanover Show to see the 130ST and were very disappointed at its absence' said a spokesman.

'The decision to scrap this model was a further blow. But we are delighted to hear it will be replaced by something even better.'

Rethink

'I think this will be the right machine for the market – a powerful computer for the price you could normally only buy a Commodore and disc drive.

'The new machine could bring about a rethink by distributors who have backed away from recent deals offered by Atari because of margins and stocking commitments.'

Major distributors Terry Blood and Lightning were unhappy about the non-appearance of the 130ST which they saw as a key element in marketing the range.

Joe Woods marketing manager of TBD has said: 'The 520ST is too expensive for us to take in the quantities Atari wanted.'

A more sophisticated version of the 130ST in the same price bracket could make the Atari range look attractive once again. But both TBD and Lightning would still seek less rigid distribution deals.

Lightning spokesman Tom Ferguson told *Atari User*: 'We're willing to open new negotiations for existing stock or new products, but only if the terms are different regarding stocking commitments.'

A TBD spokesman added: 'If Atari asks for the same level of commitment for this new machine as for the 520ST our position is likely to be the same – no deal.'

BACK TO JACK

THE move by Commodore executives to switch to Atari is not restricted to the United States.

Alvin Stumpf has recently swapped the post of heading up Commodore in Germany for a similar position with Atari there.

He follows a number of Commodore executives in the United States who have changed horses.

This is not a question of predatory hiring or any problems Commodore may have been currently having. Max Bambridge, Atari's European sales and marketing head told *Atari User*:

'I believe it is all very logical in that once people have worked for a winner like Jack Tramiel they would want to go out of their way to work for him again.'

Silica Shop takes over

STEPPING in where others fear to tread is Silica Shop.

It has agreed to become the official distributor for Atari following the disappearance from the scene of Terry Blood and Lightning.

The latter blamed their departure on Atari's requirements for high stock commitment – orders having to start at £250,000 – when they claimed the market did not support it.

Silica Shop's Tony Deane however said his firm did not have any qualms in accepting this commitment.

Since it began dealing with Atari in 1979, Silica had never had problems in placing large orders consistently, he said.

Expertise

'Unlike other distributors Silica Shop only deals with one manufacturer so all the funds we have all the expertise can be generated into that one area,' he explained.

Distributors who deal with a number of makes and can only put a percentage of their funds into each one would find it difficult to make a similar commitment, Deane continued.

Commenting on the Atari deal, he said: 'We are very happy with their terms. They give very good support and keep their promises. They said they would launch the ST and did so a month ahead of schedule. That's like...'

The company also liked Jack Tramiel's pricing policy and his news of a planned ST model in the £400-£500 range to replace the dropped 130ST and which would be more sophisticated.

Deane said: 'The Atari range is unbeatable, its quality superb and the price is now right. Jack's got everything going for him.'

● Asked at the Comdex Show in Atlanta how he was going to finance the proposed production of the ST computers, Jack Tramiel as bluntly as usual replied: 'From my own pocket.'

The Tramiels ... waiting for breakthrough



The Tramiels – Chairman Jack 55 with clockwise from lower left President Sam 35 Gary 25 and Leonard 30

THE fate of Atari hangs on whether or not the new ST machines achieve a market breakthrough, according to the well informed USA based Fortune magazine

If STs start selling Tramiels low prices mean trouble for Apple and IBM – and anybody else with home computer plans writes associate editor Peter Petre.

But he goes on to warn "If they don't Atari could be fighting to the death against Commodore

Author Petre takes a long hard look at Atari since Tramiel took over From this he concludes that the battling businessman wants to turn the corporation into a family stronghold to be passed on to his three sons

Sam Tramiel now the Atari president had previously worked for his father when he was the boss of Commodore He then went on to prove himself in his own right out in the Far East

The Fortune article suggests that Tramiel s younger sons are currently assigned to journeyman positions in Atari because of their lack of experience

Leonard 30 who holds a PhD in astrophysics is helping to create software for the ST machines while Gary 25 who previously worked as a stock broker now handles odd jobs in Atari s financial set up

The magazine claims that when Tramiel bought Atari it was distressed merchandise and so made to order for him

Atari had lost $539 mill on in 1983 after the video bubble burst This is said to have placed pressure on Warner Communications – under whose wing the company came at that time – to offload with Atari hemorrhaging cash

Fortune reports that the deal with Tramiel took shape during a frenetic week

Petre writes "The sale of assets agreement was a 300 page monument to expediency full of qualifications loopholes and doors left open to be closed later

Tramiel paid no cash He got the assets in exchange for long term debt and warrants that give Warner claim to 32 per cent of Atari s stock

According to Fortune the new look Atari is already claiming to be operating at a profit

That s not implausible writes Petre although the company got most of its $125 mill on in revenues during the last half by unloading bloated inventories at cut rates

Still the writer points out that Atari is currently facing enormous risks

One of these he claims is that the XE from which the corporation hopes to draw a substantial amount of revenue could face problems

"The cooling of the home computer fad could mean that the XE may already have been passed by he warns



Software set up is sorted out

LEADING UK software houses have been briefed on Atari s requirements and plans over the next few months by the company s software director Sig Hartmann

Hartmann admitted that shortage of software has been a problem for Atari in the past.

But that s not go ng to be the way in the future he promised

Under Jack Tramiel s leadership we re a much more aggressive company and we intend to see that we have the software support right across the market for our new product range

Following the company s showing at the American Consumer Electronics Show the major US software houses realised that producing for Atari was going to provide a winner for them

"We think you ll agree when the products are unveiled in Europe Hartmann told the British software publishers "We see the new Atari systems as being centres of home activity

Sure there ll still be room for games but much more emphasis is being paid to serious uses such as home accounts and word processing

Hartmann gave an indication of Atari s philosophy when questioned about the future of cassette program recorders.

"They re going to become things of the past he forecast the whole market is shifting into disc drives. Prices have to come down

£750 for the 520 ST?

ATARI has denied reports in the trade press that it intends to sell the 520ST in three different packages

A company spokesman told *Atari User* "The machine will be sold in only one configuration

"This will include 12in high resolution mono screen the 520ST with mouse 3½in 500k disc drive and bundled software consisting of Basic Logo GemWrite GemPaint TOS operating system and BOS business operating system

At press time Atari was hinting at a price in the £700 to £800 range for this package

In fact if you said it was going to cost £749 99 you would probably be accurate said the spokesman

520 ST turns up – in a trickle

THE first major batches of Atari 520STs have begun arriving in Britain.

But prospective purchasers are advised to be very patient. It could be autumn before they are able to walk into a shop and buy one off the shelf.

I'm afraid the machines will be in short supply for a while yet," said a company spokesman.

"The 520STs are arriving in the hundreds rather than the thousands and we have a large backlog of orders from systems houses, educational establishments and the like that have to be filled as a priority.

On a brighter note, there should be no shortage of software when the machines become freely available.

More than 50 software houses have already bought development systems and are expecting to have finished or nearly finished products by the beginning of September.

By that time more than 100 – perhaps as many as 200 – software houses are expected to be working on programs for the 520ST, ranging from games to specialised business packages.

50 packs promised

AN announcement that more than 50 ST software packages would be released by July 8 was made by Atari's vice-president Sigmund Hartmann at the recent Comdex Show in Atlanta.

To be included in that number was a Lotus 123 superset, he said.

And when those gathered at the press conference complained about Atari's poor press packs, he ended: "There are times to have caviar. There are times to have beans. This is our time for eating beans – but we plan to eat caviar when our time comes."


Canoe champions rely on an Atari

ATARI users watching the Rapid Racing canoeing on ITV's World of Sport recently may have noticed their favourite computer getting a lot of credit during the various score readouts.

In fact Atari regularly plays an important role at the annual championships held on the white water at Bala, North Wales.

The event attracts the world's top canoeists from all disciplines to compete against each other over four different races in four days.

The occasion is covered by a big TV crew which depends on an Atari for accurate results data processing and most of the score displays and lists of competitors that appear as overlays on the television screen.

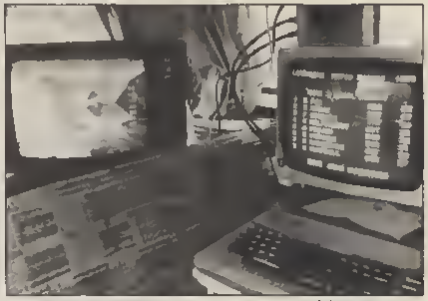

The Atari's output is used as an overlay by the TV team

Sophisticated

This work is done on an "old" Atari 800 with an 810 disc drive, high speed printer, 850 I/O box, three monitors, a sophisticated computer/TV interface adapter and various other boxes of tricks.

All of these are arranged in a mobile caravanette and operated in conjunction with the timing computers by a two-man team.

The 20k machine code program was written for Atari by Archer MacLean, author of DropZone among others, and is a cleverly thought out menu-driven system allowing a non-technically minded person to operate it.

It gives the user instant access to and from a wide variety of functions and can cater for up to 64 named and numbered competitors in four independent sets of race results allowing both mid point and finish times.

At any time results can be quickly printed or displayed on demand in a wide variety of presentation styles and can be based on points or times for any race or all four races combined.

The operator can also edit and rearrange screens before display so that special messages can be generated as requested by the TV director.

Says MacLean: "The Atari equipment used is five years old now and is probably one of the most travelled systems in use.

It performed as faultlessly as ever last time out, despite being used in a very damp atmosphere at some very awkward-to-reach riverside locations.

In fact it only failed once – when the generator ran out of petrol!

CUT PRICE GAMES OFFER ENDS

A MYSTERIOUS mail order operation offering top selling games at rock bottom prices has apparently stopped just as leading software publishers were urgently investigating its activities.

Money has been returned to people who ordered software packs from A1 Software Services of Hornchurch, Essex.

Famous titles like Pole Position, Ghostbusters and Jet Boot Jack were mentioned in the promotion which offered the general public as many as 50 games for £30.

One software publisher who sent a postal order for £19 to A1 Software Services for a pack of 15 games had his money returned along with a slip of paper saying: "A1 Software Services has ceased trading."

I shall be pleased if this mail order operation has stopped," he said. "I was most concerned that our titles had been mentioned in it and our legal department was ready to act should any infringement of copyright have been involved.



String along... and pick up some

WE saw last month how to write our own programs, however primitive. Now we'll look at some ways of improving them. I don't guarantee that you'll be able to produce spectacular programs by the end of this article, but you will certainly be well on the way to an understanding of Basic.

Expand your knowledge of programming with PART THREE of MIKE BIBBY's guide through the micro jungle

First though let's recap a little. We saw last month that a Basic program consists of a numbered sequence of instructions to the computer.

To enter one of these instructions we simply type the correct line number followed by the appropriate Basic keyword then press Return.

As we discovered because of the line number the Atari doesn't do what you tell it immediately but remembers it as part of the program.

To see all the instructions in a program we type

LIST [Return]

To actually get the Atari to carry out the sequence of instructions we type

RUN [Return]

To clear a program from memory (and we should do this before entering a new program) we use

NEW [Return]

We saw that we tended to enter line numbers in steps of 10 to allow us to fit in other instructions between them if necessary. Also we found that we could replace a line with a better version by simply giving the new version the line number of the old one.

```
10 PRINT "PROGRAMMING"
20 PRINT "IS"
30 PRINT "EASY"
```

Program I

Finally to delete a line completely we simply type the line number and press Return.

Program I is the one we started with last month. Before we continue type it in and run it to make sure you know what's going on.

Program II is another way of

```
10 DIM A$(12),B$(12),C$(12)
20 A$="PROGRAMMING"
30 B$="IS"
40 C$="EASY"
50 PRINT A$
60 PRINT B$
70 PRINT C$
```

Program II

achieving exactly the same output. Type it in and try it.

Apart from it being an incredibly long-winded way of doing things what else is going on?

Well, as you will recall from the first article in the series the words inside quotes are known as strings – because the computer simply remembers them as strings of letters. That is it considers HAMSTER as H followed by A followed by M and so on with no idea of the word's meaning.

I don't think that it takes all that much imagination to see that when your computer is printing a lot of output you might be using the same string rather a lot.

For example, in a business letter you might use the name of the company fairly frequently – for instance BBC for British Broadcasting Corporation. Atari Basic allows us to use much the same idea but more as labels than abbreviations.

For instance in line 20 of the above program we have labelled the string PROGRAMMING with the label A$.

In computer terms we have assigned to A$ the value PROGRAMMING.

All this means is that from now on wherever I want to use PROGRAMMING in my program I can replace it with A$. So line 50 which is

50 PRINT A$

causes the micro to print out PROGRAMMING.

Admittedly in this example this technique of labelling doesn't save



handy jargon

much space or effort but if the program uses the word PROGRAMMING 100 times there would be a substantial saving in using A$ instead of the string itself

Similarly line 30 causes B$ to label IS and line 40 labels EASY with C$ so that lines 60 and 70 give the appropriate printout

Notice the following points

● We have chosen our labels so that they consist of a letter of the alphabet followed by the $ sign Actually we don t have to restrict ourselves to just one letter as we shall see but our label must end with the $ sign since this warns the computer that we are labelling a string And the letter we use must be a capital (We ll see later how to label other things)

● While I used A$ for the first label B$ for the second and C$ for the third this was totally arbitrary on my part – labels don t have to follow alphabetic or any other kind of order

● Although we use an equals sign (=) to connect the label with what it is labelling it is safer as we shall see not to think of it as an equals sign – think in terms of A$ becomes PROGRAMMING rather than A$ equals PROGRAMMING

● We must have the label on the left and what is labelled on the right of the equals sign A line such as

```
20 "PROGRAMMING" = A$
```

just does not make sense to the Atari Try it for yourself!

● When labelling we put the string inside quotes as we did previously when using the PRINT statement to print out strings So line 20 reads

```
20 A$ = "PROGRAMMING"
```

From now on A$ completely replaces PROGRAMMING quotes and all, so that when we say

```
PRINT A$
```

we don t have to use any quotes – they re already there (implicit in the label A$

All right but we still haven t explained line 10

```
10 DIM A$(12),B$(12),C$(12)
```

Well it s all to do with the micro s good housekeeping Just as, when you throw a party it s helpful to have an idea of the maximum number of guests you expect so it s only manners to tell the Atari how large you think each string is going to be It can then set aside a suitable amount of memory for the strings

We do this with DIM – a new Basic keyword that fixes the maximum number of letters or characters to be associated with each label

For instance if we had a string label X$ and we never wanted it to refer to a string of more than ten characters in length we would have a line such as

```
10 DIM X$(10)
```

Notice

● The keyword DIM followed by a space

● The label X$ followed directly – no space – by the maximum length you want to label in brackets

That s what we did in line 10 of Program II This time we had three labels to dimension – A$ B$ C$ – so we put them all in the same line separated by commas

You might also notice that I ve been pretty wasteful with my dimming as it s known – I ve given each label a maximum length of 12 although as you ll see from the rest of the program, none of my strings is that long

I could have got away with

```
10 DIM A$(11),B$(2),C$(4)
```

Try running Program II with this

new line if you don't believe me. Remember all you have to do to alter a line is to retype it (starting with the line number of course) then press Return. The new version of the line will replace the old one.

What would happen if we didn't DIM enough room for a string being labelled? Try replacing line 10 with:

10 DIM A$(8),B$(2),C$(4)

If you've done it properly when you run it you should get the message

PROGRAMM
IS
EASY

As you can see, the label A$ accepted as little as possible.

All right, but you wouldn't make this sort of mistake would you? After all you can just look at a program and see how big the strings you're labelling are going to get.

Yes, but the strings you're labelling can change size as in Program III:

```
10 DIM A$(7)
20 X$="BIG "
30 PRINT X$
40 X$="BIGGER"
50 PRINT X$
60 X$="BIGGEST"
70 PRINT X$
```

Program III

where what X$ labels varies from BIG via BIGGER to BIGGEST. Hence another more common name for these string labels – string variables.

Notice each time you give a string label or variable a value that value replaces the old value. These variables really vary.

Now when we label a string the label refers to whatever is inside the quotes including spaces as you will see if you run Program IV.

Notice that our punctuation – semicolons – works for labelled strings just as it worked on its own.

Notice also that we have introduced a new Basic keyword in line 10 – REM. We use REM which is short for REMark to add comments or headings to our programs.

"It is good programming practice to include REMs"

When the Atari encounters REM in a line it ignores everything else after it on the same line. This means we can write whatever we want after REM (providing it is on the same line) without fear of the micro giving us an error message – the Atari doesn't read the line beyond the REM.

If we use REM to prefix our comments we can annotate our program. Certainly each main subdivision should have one or more REM statements explaining what is going on.

Since the Atari ignores the contents of REM statements you could leave them out of your program entirely and it will work as effectively. However it is good programming practice to include them.

In Program IV I have used a single REM at the beginning of the program as it is so short. Bear in mind however that REM can appear on any line in a program.

Now for some jargon. From now on we shall refer to our labels as variables. Don't be put off by the mathematical sound of that – they are still just labels. And instead of saying we are labelling we say we are assigning as we have mentioned previously. The actual string involved is known as the value of the variable. So

A$ = "TEST"

reads "the string variable A$ has assigned to it the value TEST". The actual act of giving a variable a value is called an assignment.

To return to the world of actual programs you can mix and match string variables and actual strings however you want.

Program V illustrates the point:

```
10 REM PROGRAM V
20 DIM A$(10),B$(5)
30 A$="MY NAME IS"
40 B$=" MIKE"
50 PRINT A$;B$
60 PRINT "MY NAME IS";B$
70 PRINT A$;" MIKE"
```

Program V

Notice the space at the beginning of the string assigned to B$ – you need this otherwise the output looks rather odd. Leave it out if you don't believe me.

As we saw last month a semi-colon at the end of a line causes the next output to start immediately after the last and not on a new line – as it would do in the absence of the semi-colon. That is it glues the strings together.

The internal semi colons of lines 50, 60 and 70 do much of the same gluing variables to strings and so on.

Also on the subject of grammatical propriety when we're assigning variables we should use the LET statement. So line 40 should read:

40 LET B$ = "MIKE"

As you've already discovered we can omit LET altogether.

● *Next month more on variables and INPUT – which opens the door to effective programming.*

```
10 REM PROGRAM IV
20 DIM A$(7),B$(7),C$(7),D$(7)
30 A$="TEST"
40 B$=" TEST"
50 C$="  TEST"
60 D$="   TEST"
70 PRINT A$;B$;C$;D$
80 PRINT "0123456789012345678901234567
85"
```

Program IV

Silicon Chip

No. 1 FOR ATARI*

Atari 520 ST

GUARANTEE
Our EXCLUSIVE Direct Exchange Guarantee is available FREE OF CHARGE to all our customers
If a product purchased from SILICON CHIP becomes faulty due to a manufacturing or component defect within ONE YEAR of purchase we will subject to availability exchange for new



PRICES

Atari 520 ST	**£699.99**
+ 500k Disk Drive	**£699.99**
+ Black & White Monitor	**£899.99**

The prices of the ST from SILICON CHIP Ltd include Basic Logo a word Processor GEM Draw and GEM paint

POWER WITHOUT THE PRICE

Chipsoft Integrated Accounts Package
Including Stock Control
Nominal Sales and Purchase Ledgers **£250**
Final prices and specs may be subject to change

SPECS
512K RAM
Expandable Rom
MIDI Interface RS232
Serial/Centronics Parallel
Interfaces Floppy Disk and Hard
Disks Interfaces. RGB Video and TV
outputs. Sound Generator with 3 channels
2 Joystick Ports 3 Graphics and Text Modes –
320×200 = 512 colours 640×200 = 4 colours 640×400 B/W
16 Bit Meterola 68000 Microprocessor running at 8 mHz

SILICON CHIP LTD, Showroom address:
302 High Street, Slough, Berkshire. Tel: 0753 70639

** 1st Atari Business Centre.*
** 1st Dealer for 130 XE.*
** 1st Dealer for 1029 Printers*
** 1st Dealer with our own Software House for Software Support*
** 1st Dealer for 520 ST?*

Please phone or write for full details.

A map's a must in these sprawling brawling Level 9 a

says Brillig

FOR those of you who have been reading this section of *Atari User* every month, it may seem that virtually all adventure games are written by the American race. Adventure International and Infocom have dominated my examination of the origins and the different types of adventures available.

There are however plenty of good adventure writers from these fair shores and the recent release of Emerald Isle by Level 9 gives an ideal opportunity to examine one of the best known of them.

Emerald Isle is the seventh adventure released by Level 9 for the Atari and is text only although other machines which the firm covers now receive the graphics treatment.

In the next few months we shall visit all seven, but for the moment I will concentrate on the first and the last to give an idea of what immersing yourself in a Level 9 game is like.

The golden rule in adventuring is to make a map so that no matter how perplexing your surroundings you can always find your way around. This is never truer than when playing a Level 9 game as their speciality is in big sprawling games.

To give you an idea of what this means their first release was an adaptation of Colossal Cave the grand-daddy of all adventures faithfully programmed from the mainframe original down to home micros by using a sophisticated text compression technique known as the A-Code.

This coding allowed the Austin brothers Pete and Mike, to reproduce the game despite the limitations of memory of home micros at that time. Not content with this they then proceeded to add a further 70 locations of their own as an endgame making their version the most original of the many copies of Colossal Cave on the market.

So putting the earliest and most

Quasimodo leaves a tuneful

HIGH in the church tower Quasimodo deafened from years of playing footbell (think about it) is a bit miffed because the local parishioners keep telling him the bells the bells are out of tune.


This of course is completely untrue and to get his own back he has cut all the seven ropes and left them in a complete tangle on the vestry floor.

The people have commissioned the BBC (Belfry Builders Club) to sort out the mess and they in their infinite wisdom have picked you one of their best men to do the job.

All you have to do is identify which rope is which down in the vestry and then pull them in the right order. The only commands you need are U (Up) D (Down) T (Tie) and P (Pull).

Despite what you may assume after hours of puzzling the problem has a solution. The best of luck – you're going to need it!

```
1 REM QUASIMODO
2 PRINT CHR$(125)
5 DIM A$(10),B$(10),C$(10),D$(10),V$(10),D
$(10)
20 M=0
30 N=0
40 M=7
50 FOR I=1 TO 8:A$(I)=0:NEXT I
60 FOR I I TO 9
70 E=INT(RND(1)*M)+1
80 IF A$(E))0 THEN 70
90 A$(E)=I
100 A$(I)=E
110 NEXT I
200 GOTO 270
220 PRINT "You can't do that"
240 PRINT "What now ";:INPUT V$
260 V$=V$(1,1)
270 IF V$()"P" THEN 290
280 IF F=0 THEN 340
290 M=M+1
295 IF M=2 THEN PRINT "Quasimodo ties
the ";B," ropes to two ";E;" bells"
298 PRINT "You are in the vestry.":PRI
NT B;" ropes hang from the ceiling"
299 F=0
310 FOR I=1 TO 8
320 A$(I)=0
330 NEXT I
340 GOTO 140
350 IF V$()"T" THEN 410
360 PRINT "Tie which two ropes ";:INPU
T B1,B2
370 IF F=0 THEN 390
380 A$(A$(B1))=A$(B2)
390 A$(A$(B2))=A$(B1)
400 GOTO 140
```



reosnt games side by side how have Level 9 developed? In comparing the two games the first impression is that nothing much has changed in Level 9 s presentation Each location receives a description of the surroundings plus any useful objects that may be lying around

The text is often lengthy in direct contrast to Scott Adams games where the location details are placed on the screen in a brief and well defined format. While this gives a Level 9 screen an untidy appearance after a few moves it does give scope for more atmospheric scene setting

To demonstrate this it takes only a few moves in Colossal Adventure to have visited wide open countryside travelled along a riverside followed a stream and spent ages wandering in a maze of caverns occupied by some of the more unsavoury elements of adventuring

Dwarves and pirates seem to abound in this underground wilderness, and the cautious adventurer is wise to arm himself as quickly as possible to prevent his life being lost

This is mainly due to the fact that on death you are likely to find that your gains to date ill-gotten or not have been spread around the adventure just to make things a little less easy for you

As you can see to play a Level 9 game takes a good deal of stamina and persistance their latest offering being no exception It also demonstrates a movement in adventures which I for one applaud

Instead of being a glorified treasure hunt a theme which has been well explored now Emerald Isle offers a specific goal

In it you are a crashlanded pilot who an route to deliver valuable documents made the mistake of taking a short cut across the Bermuda Triangle Hence you start the game suspended by your parachute in a mangrove forest as a collection of forest predators sense an early lunch

Although escaping is not a great problem you soon find yourself blundering around until you find a treetop city It transpires that the only person allowed to leave the island is its monarch

This will obviously pose an out-of-work pilot with a few problems but fortuitously there is a contest to become the ruler although — as the authors take great pleasure in pointing out — the rules of this competition are not included in the announcement

Travelling around the city proves to be no real problem once you are dressed for the part but all is obviously not well

The clock tower no longer works despite it being of Victorian design although Big Ben never seems to have those problems and just about every gate in the city is locked

However a trip to the beach is easy as the rail system here knocks BR into a cocked hat

On the beach you find the solution to a rather knotty problem that has been troubling the government of late with the missing Conquerer's log as well as a starving spider although you may not need to come to a sticky end As usual Level 9 retain their unique brand of humour throughout

At the moment I am in urgent need of a lamp, preferably working which is doubtless hidden somewhere far off and obscure To date I have not indulged myself in Level 9 s voluminous hint sheet despite much hair tearing and cursing although this probably explains why my score out of a thousand has yet to reach treble figures!

At £6 95 this has to be the best Level 9 value yet and I have no hesitation in recommending you to buy this one

Not such a glowing reference for Murder on the Zinderneuf I m afraid Any game purporting to be an adventure but yet requiring a joystick immediately arouses my suspicions The basic idea in the guise of a series of thinly-disguised fictional detectives is to investigate a missing person case aboard the Zinderneuf a transatlantic airship

This is accomplished by steering your detective silly name and all around the ship to search for clues and question suspects in a variety of different tones and pursuasive manners until you accuse the murderer Get enough evidence and they hang Not enough or just plain wrong and you carry on searching

The manual which accompanies the game is neatly produced including a map of the rooms on the ship and potted biographies of the characters involved Each game takes place in simulated real time and by reference to the manual you can soon get the hang of which way to go to search a room

Searching however consists of wandering around a room until a message appears to tell you either what you have found or that there is

→

nothing of interest Nothing very adventurous there

The graphics are clear and the scrolling is also well executed but overall the game left me with a feeling of playing a souped-up Cluedo At £11 95 for the disc from Anirolasoft I thought this was a trifle steep so it s frustrated Cluedo addicts only for this one

Two last comments on the column to date As you can see there are numerous problems in adventures so if you are stuck don't hurl the caesette through the nearest window but drop me a line and I ll do my best to help out without actually telling you the answer

Also if you find any bugs or problems with a game let me know A lot of them can be rather amusing Just to start you off Level 9 has a lawn in Emerald Isle yet the response to GO LAWN isn t quite what you would expect Nobody s perfect!

Housing the Fifteen

THE problem posed in the June issue of how to become governor and make the Filthy Fifteen STOP is difficult even though there are thousands of solutions The simplest general method is to modify the program to search through possible combinations rather like solving the eight queens on a chess board puzzle Here is one solution

N1	1 2 3	4 5 6	7 8 9	10 11 12	13 14 15
N2	1 4 7	2 5 8	3 12 15	6 10 14	9 11 13
N3	1 10 13	2 11 14	3 6 9	4 8 12	5 7 15
N4	1 5 14	2 9 12	3 4 13	6 7 11	8 10 15
N5	1 8 11	2 6 15	3 7 10	4 9 14	5 12 13
N6	1 9 15	2 4 10	3 5 11	6 8 13	7 12 14
N7	1 6 12	2 7 13	3 8 14	4 11 15	5 9 10

BULLOCK SOFTWARE



ATARI SOFTWARE SPECIALISTS FOR MAIL ORDER

Games Software

Dig Dug C/D	£9 95/£14 95
Blue Max 2001 C/D	£9 95/£14 95
Bruce Lee C/D	£9 95/£14 95
Dreibs C/D	£9 95/£14 95
Forbidden Forest C/D	£9 95/£14 95
Snokie C/D	£9 95/£14 95
Spitfire Ace C/D	£9 95/£14 95
Beach Head D	£14 95
Dallas Quest D	£14 95
Dropzone C/D	£9 95/£14 95
Conan C/D	£9 95/£14 95
Mr Do C/D	£9 95/£14 95
Ghostbusters D	£14 95
Quasimodo C/D	£9 95/£14 95
Miner 2049er	£12 95
Hover Bower	£9 95
Space Shuttle ROM	£15 95

Magazines
Antic
Page 6
Atari User

Just in
O-Level Maths
Years
1, 2, 3, 4
revision
C/D £8 50/£12 95

Utilities
Basic Compiler (D)
Mac 65 (ROM) & Toolkit
Basic XL (ROM) & Toolkit
Action (ROM) & Toolkit

Atari 130 £189 99
Atari 520 ST
Coming soon
Atari 800 + cass
£129 99
Atari 800 + disc
£269 00

ADD 25p p+p

MUCH MORE ON OUR LISTS SEND SAE FOR PRICE LIST

HOT LINE (021) 783 2908

Add 75p p+p books & magazines
Add 25p p+p software

984 Washwood Heath Road, Ward End, Birmingham B8 2NB

Strategy's the name of the game

EVERY so often a game comes along that reeks of class **MULE** is one of those games It will delight you from its catchy theme music to your last auction

MULE is a strategic game involving cunning and a touch of the stock market

What? I hear you say, Not one marauding alien to blast into oblivion? Boring

MULE is anything but boring I enjoyed playing the game for hours on end

The idea of MULE is that you have been left on a planet and in order to survive you



must develop the natural resources of the world


This is achieved by your MULE (Multiple Use Labour Element) – a robot designed to do all your strenuous mining tasks

Each MULE has to be outfitted for developing the different resources which are food energy and smithore

MULEs are made from smithore which makes it a precious substance Once outfitted you must install it in your plot of land

In the one-player game you are competing against three computer controlled players but you may play against your friends if desired

After developing your stock you go to the auction round



where you can buy or sell your stock to the other players

This is where all you closet businessmen and women will emerge as you collude and haggle over prices

After the auction round has finished you are then awarded a free plot of land to develop

You might think it a easy – but just watch out for the pirates who will steal your hard-earned stock

Also the storms will drive your MULEs crazy And there are other little problems



that make sure you never have a dull moment

There are plenty of other features in the game but it would take a few pages just to note them down let alone explain them

To understand the game at its full potential you really should read your manual

MULE has three levels – beginner standard and tournament Each level is challenging and enjoyable

The game is fun to play and has some nice little graphic touches and sound

However one possible improvement could have been the ability to save your game to disc

This is quality software from Electronic Arts which is to be expected from this renowned software house

MULE will certainly become part of my collection

Pete Irvin

TRYING HARD, BUT...

THE latest game from English Software **Kissin' Kousins,** has an interesting innovation – speech But don't get too excited – there's precious little of it

Kissin Kousins is an arcade game in the mould of Hunchback Popeye and others of that ilk You must guide the tiny hero past a series of hazards in order to save the heroine

Immediately the game has loaded you'll hear a clear and cheerful voice declaring English Software presents Kissin Kousins!

Very impressive Only trouble is that's the last time you'll hear that particular snatch unless you reload the game

The only other speech I encountered was on the title screen Here a damsel in distress was shouting Save me!

This wasn't so impressive The voice sounded more like a tremble female impersonator with a sore throat

Still this is a step in the



right direction and deserves full marks for effort

So what about the game itself? Well I'm afraid it's not one of English Software's best.

The backdrop to the game is a static street with buildings stores and hoardings most of the action taking place on a narrow strip of the screen

The obstacles on screen one include bushes hydrants and dustbins with pop up lids These are placed at ever-decreasing intervals so the timing of your jumps is critical

Just to add to the difficulty a plane flies overhead dropping large red bombs and each screen must be completed within a tight time-limit.

If you hit an obstacle get blasted by a bomb or just run out of time you lose one of your five lives and must start at the beginning of that screen

When all lives are lost the scene scrolls to reveal a large hoarding showing Game Over

Once you've safely reached the right hand side the picture scrolls smoothly to the left to reveal the next section

Screen two has waggling caterpillars as the major obstacle Later sections include bouncing kangaroos bats and frogs

The frustrating thing about the game is that there is no option to start again from the last screen completed You always recommence right back at the very beginning

Although it's a fair game Kissin Kousins lacks variety and excitement Not one I'd go out of my way to buy but worth a play

Bob Chappell

Riveting, no less

HARD Hat Mack, by Electronic Arts is a levels and ladders game. The action takes place on a building site and there are three completely different screens.

To succeed on the first you must climb to the top by filling in gaps in the platforms using steel girders.

While doing so you must avoid rivets which are being thrown down from above by an invisible assailant.

Once you have plugged all the gaps you have to rivet each girder in place with a special gun that zips along the levels looking rather like a spinning top.

To assist your progress there are chains at one end of each platform which you can climb up.

In addition there is a trampoline that you can use to bounce up to the next levels and there is also a lift at your disposal which takes you up three levels.

On the second screen you have to race around collecting lunch-boxes.

In order to access the different levels you have to hop on to a girder which is hoisted up and down by a winch.

On the first two screens there is a meanie called Vandal whose sole purpose is to make life unpleasant for you. One touch from him and you're dead.

On the third screen two meanies appear – Vandal and Oahe a robot like creature. On this screen you must collect boxes and put them into a chute. In the centre there are lifts that Hard Hat Mack can ride to get to the different levels.


The game is in black and white and as a result the hi-res graphic detail is superb. Naturally the game as a result lacks colour but you can't have your cake and eat it.

It could perhaps have been improved by the addition of some more different screens and a keyboard option would cater for those unfortunate Ataricns who haven't got access to joysticks.

Nevertheless the game is extremely addictive and great fun to play. And if you'll excuse just one pun. If your tastes are like mine you'll stay riveted for hours!

The cassette version costs £9.95 and the disc version is £12.95.

David Andrews



Mack [illegible] along [illegible]

Given the bird – and loved it

WHEN Miner 2049er was released on an unsuspecting Atari computer owning public some two or three years ago little could its creators have realised what a phenomenal amount of clones it would spawn.

Every popular machine has more than its fair share of jumping and climbing games. The best-known probably being the Miner Willy games available for the Spectrum.

One thing that all these games have in common is that they owe their concept to Miner 2049er – and we Atari owners are smug in the knowledge that we saw it first.

Now – after what is probably the longest ever wait for a follow up in computer games history – comes **Bounty Bob Strikes Back**.

Originally to be called Scraper Caper this game has arrived well over a year after full colour double-page advertisements for it appeared in American computer magazines. Talk about starting the hype early!

All of this of course leads to the inevitable question – was it worth the wait?

The answer must be a resounding YES!

I made arrangements to borrow the cartridge from a (rich) friend (thanks Nigel) who had bought it direct from the States at great expense (the pound was just about one for one against the dollar at the time).

The time limit on the loan was to be a maximum of two weeks as he couldn't bear to be parted from it for any longer.

The whole Bounty Bob package reeks of sharp American techno flash right from the box which is at least five times bigger than it needs to be. The instructions which are in the form of a giant full-colour poster and fortunately the game itself.

I inserted the cartridge into the left-hand slot of my trusty Atari 800 switched on and – what? A grid with birds flying around carrying letters? Could this be the correct game I had here?

But sure enough it was. The birds actually fly all around the screen and drop the letters into the grid and spell out the game title programming information and other relevant details.

The option key gives access to a user definable customiser screen which includes the amount of lives for Bob, difficulty level, music volume – you name it you can change it.

There is even a line called special code which the instructions say little about only that it allows Big Five programmers access to the games code.

One surprising omission is the inability to enter the game from anything but level one but this is sorted out after clearing certain levels of the game.

Secret messages are flashed on to the screen with the necessary information to enter the game at higher levels.

On pushing Start the first screen scrolls smoothly from the bottom to the top of the TV screen in that familiar way that we Ataricns know and love.

And suddenly there they all are – Bob the mutants and the transporters that we've all seen before on Miner 2049er.

Then came the first feeling – of disappointment. Was this just going to be a re-run of Miner?

Bob certainly looked exactly the same – that old familiar grin on his face and his battered hat perching jauntily on his head shuffling along filling in rectangles fit to bust.

It took me quite some time getting through that first screen but I'm glad I persevered with it – from the second screen on the action gets far more fast and furious and every screen is absolutely alive with a whole wealth of new and reworked ideas.

I only managed to get to level five and I played the game a heck of a lot in the two weeks that I had it.

Not since Boulderdash (which I personally rate as the best computer game of all time) have I come across such a 100 per cent addictive game.

It is so alive with great ideas that you'll eagerly play it until two in the morning just to glimpse the next screen so

you can go to bed and have nightmares about how the heck you're ever going to get through it the next day

Just a quick word about the hi-score screen. It's about the most inventive I've ever seen. Just take a look for yourself.

The only minus point I can think of about the game is that I can't find a way to cheat by jumping into any level.

Typing in the Big Five phone number to jump levels in Miner 2049er was an open secret to most Aten-owners. I've yet to find the secret on Bounty Bob.

I'm sure it's something to do with that special code on the customisar screen.

It's certainly not the phone number this time around – I've tried. And besides the phone number is used to warp you out of tricky situations where you would normally have to wait for the game's timer to count you out.

Incidentally, for those of you who must be wondering at this point – No, I don't work for Big Five Software. I don't know the programmers personally and I sure haven't got shares in the company – I'm just a dedicated Atari user who loves classy games.

At the time of writing Bounty Bob was only available on import from America at the horrendous price of £49.95.

But the good news is that US Gold should be bringing it out soon for a lot less.

It'll be the bargain of the century so beg, borrow or sell your old Dragon (no, not your mum, stupid) but rake up the money somehow and make sure you get a copy.

David Rollo

The hard route to the top

IF chess is a little too violent for your delicate sensibilities if you'd rather run away than attack and capture, perhaps you need **Pensate** from Penguin Software.

In this game the object is simply to get from the bottom of the 8 x 8 board to the top while avoiding the computer's pieces.

The computer has 10 different pieces available, some of which move in a different way depending on how *you* move. The direction arrows always move the way they are pointing, but the other pieces are more devious.

For example, the piece with black and white arrows always moves in the opposite direction to you. The piece which looks like a continental round about signposts moves left or right if you move up or down and moves up or down if you move right or left.

The two horse pieces have a chess knight's move, but in a particular direction depending on which way you go.

There are two basic modes, practice and tournament – and you'll need to start in the former. In this you can choose which pieces the computer has on the board and also their starting positions.

In practice mode it's very easy to win if you're desperate to. Simply give the computer a couple of pieces that will do nothing but move out of your way.

Of course, the more interesting games are played in tournament mode. Here you get to specify the skill level at which you play, and this determines the complexity of the playing plan which the computer chooses for itself.

However, your opponent is also required you to plan at least two moves ahead. That is, you specify your next two moves each time.


Your first move is taken, then the computer moves its pieces one at a time. Then the process is repeated with your second move following, which you specify in your next two moves.

Once you really get the hang of it you can choose to play up to four moves ahead. If the computer has a few pieces on the board it may get quite tricky trying to predict the future.

You win by getting to the top of the board and you lose by colliding with one of the computer's pieces. However, if one of the computer's pieces lands on another it makes its own move again.

The computer has the added advantage that its pieces wrap around. If they hit the edge they reappear at the opposite edge. If your pieces hit the edge they get killed.

While you're learning you can set the speed option to slow and watch the pieces make their moves. The manual promises that once you've mastered the moves a faster speed will allow victory to come swiftly. Yes, but victory for whom?

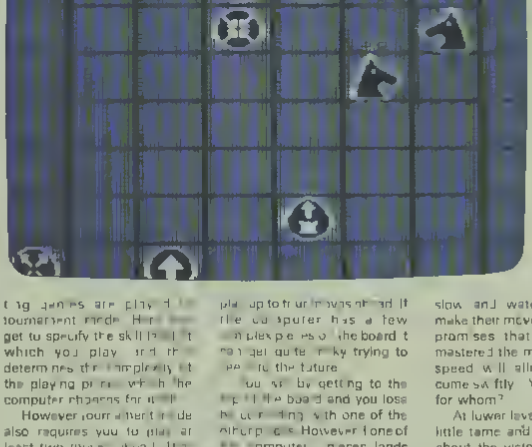

The Pensate pieces have devious ways of moving

At lower levels Pensate is a little tame and you get blasé about the victory tune. However once you get involved and move up a few levels it's a real brain bender. It's then that the tune becomes a true reward.

The facility to start very simply makes Pensate a very accessible game, but don't be fooled. If it grabs you it could change the way you move around the office.

Cliff McKnight

Redefine
cheating

Part Three of DAVE RUSSELL's series on the Atari graphics modes

WE looked at Graphics 1 and 2 last month and saw how they were split screen text modes. We also saw that only half the character set was immediately available – normally the numbers and upper case letters.

Now we'll access the hidden half of the character set and see how we can use lower case letters in Modes 1 and 2.

Let's start with one of the little programs from last month. Type in and run Program I.

```
10 GRAPHICS 1
20 POSITION 5,5
30 PRINT #6;"ATARI USER"
```

Program I

It should produce our name in orange upper case letters and the word Ready should be in the text window at the bottom of the screen.

The operating system can only see the half of the character set containing upper case letters at the moment. However there is a location in memory which tells the system which half to look at.

Location 756 usually contains the value 224, which specifies the upper case half of the character set. If you'd like to verify this, simply type

PRINT PEEK(756)

in the text window. The value 224 should appear at the top of the text window.

In order to convert our name to lower case all you need to do is change the value in location 756 to 226. You can do this by entering

POKE 756,226

in the text window. Try it now and see what happens. There's our name in lower case as promised, but what are all those hearts doing there?

If you laid the two halves of the character set out next to each other, the lower case letters would line up with the upper case letters. That's why ATARI gets changed to atari.

The hearts arise from the fact that the space character lines up with the special graphic heart shape. Consequently changing the value of location 756 to 226 causes a heart to be printed wherever a space was printed previously, which in this case means most of the screen.

A screenful of hearts might be useful on one particular day in February, but far most of the time they tend to clutter up the display.

There are two ways we can get rid of the hearts: one by cheating, and losing one of the available colours; the other by redefining the character set. With the screenful of hearts, enter

SETCOLOR 0,0,0

and the screen should be blank again. All you've done is change the colour in register 0 to the same colour as the background. Hence the hearts are still there in one sense – they're just printed in the same colour as the background. It's a bit like using black chalk on a blackboard.

Unfortunately although our name is still there, we can't read it because its colour was also defined by register 0. We saw how to change colour last month by using lower case letters to select a different colour register, so we can use this technique now to restore our name.

Press Reset and enter Program II.

```
10 GRAPHICS 1
20 SETCOLOR 0,0,0
30 POKE 756,226
40 POSITION 6,5
50 PRINT #6;"Atari User"
```

Program II

When run it will produce the familiar result in lower case, with the letters now being green instead of orange because register 1 is selected.

The second method of removing the hearts requires a little more work but introduces a technique which can be put to good use in other ways. It requires us to redefine the character set.

When you turn your micro on the characters are already there because they are held in read-only memory – ROM. As the name implies we can only read from this sort of memory, we can't write to it or alter it.

Now if the character set was in RAM – random access memory, more properly called read and write memory – we could change it at will. What we must do then is move the character set into RAM so that we can change the heart character to something else.

We don't actually move the character set, we simply copy it, just like taking a photocopy. However before we do this we need to know how the micro represents the characters if we're going to change some of them.

If you look closely at the heart shapes you'll see that they are made up of little dots. The micro represents each dot as a bit of information in its memory, and each memory location can store eight bits or a byte as it's known.

If you've been following Mike Bibby's Bit Wise series you'll know that a bit can be either 1 or 0. If it is 1 then a dot gets printed on the screen. If it is zero, no dot is printed.

Each character is represented as

e that
heart

an 8 x 8 matrix of dots and so requires eight bytes of memory The bit pattern for the heart shape looks like this

```
00000000
00110110
01111111
01111111
00111110
00011100
00001000
00000000
```

With not too much difficulty you can see that the 1s form a heart shape against a background of 0s

Each row of the matrix can also be read as a number by converting the binary representation to decimal The top row of the heart would be 0 the second row would be 54 the third row would be 127 and so forth

In order to redefine the heart shape as a space we need to set the bit pattern of the character to the bit pattern of a space Fortunately the bit pattern of a space is easy to remember – it s simply eight rows of eight zeros All we need to know now is where the bit pattern is held in memory We ll know that when we decide where we re going to put the character set in RAM

Program III copies the character set into RAM and redefines the heart shape as a space However it needs to do some housekeeping on the way so I ll explain what each line is doing

```
10 RAMTOP=PEEK(106)
30 POKE 106,RAMTOP-4
35 GRAPHICS 1
40 CHBAS=RAMTOP-4
50 ADDR=CHBAS*256
60 FOR X=0 TO 1023
70 POKE ADDR+X,PEEK(57344+X)
80 NEXT X
90 CHAR=64
100 POS=ADDR+(CHAR*8)
110 FOR X=0 TO 7
120 READ A
130 POKE (POS+X),0
140 NEXT X
150 DATA 0,0,0,0,0,0,0,0
160 POKE 756,CHBAS+2
170 POSITION 5,5
180 PRINT #6;"ATARI USER"
```

Program III

The character set occupies 1k of memory so we need to set aside this amount of RAM and protect it in order that the rest of our program doesn t interfere with it The easiest way to do this is to move the top of memory down by 1k and put the character set in there If we tell the micro that we ve done this it will do the necessary protecting for us

Memory is organised in $\frac{1}{4}$k (or 256 bytes) pages and so we need four pages of memory for the character set Memory location 106 holds the current position of RAMTOP the top of RAM memory so line 10 looks at the current value and line 20 moves the value down by 4 pages giving us the necessary 1k

Before we move the character set we must tell the micro that we ve moved RAMTOP, otherwise we might write over the display list The easiest way to do this is to issue a Graphics command hence line 30

We ll call the beginning of the character set CHBAS Line 40 tells the micro where CHBAS is to begin, with line 50 giving the actual location

In ROM the character set begins at location 57344 so the loop from line 60 to line 80 pokes a value into ADDR corresponding to the value held in 57344

The loop counter increments by 1 so next the value held in 57344+1 is poked into ADDR+1 This loop is carried out 1024 (or 1k) times resulting in a copy of the character set being poked into RAM and starting at ADDR

The heart is character number 64 and each character requires eight memory locations Since we know that the set begins at ADDR we can work out that the heart begins at ADDR + (64*8) Lines 90 and 100 provide the program with this information

For each of the eight bytes of the heart character in turn the loop from 110 to 140 writes a 0 as taken from the data in line 150 This replaces the heart with a blank

Lines 160 to 180 give us our old favourite message but this time it s in lower case orange

If you use this routine in your own programs use

POKE 756,CHBAS

to access the upper case characters and

POKE 756,CHBAS+2

to access the lower case characters

The advantages of this technique

ATARI

EUROPES LEADING 'ATARI' MAIL ORDER SPECIALISTS

SOFTWARE EXPRESS

INTERNATIONAL

HARDWARE

130 XE COMPUTER 128K	169 99
800XL/1010 PACK including Software	129 99
800XL/1050 PACK including Software	249 99
1029 DOT MATRIX PRINTER	199 99
WS2000 MODEM	149 55
MODEM INTERFACE c/w Viewterm software	59 95
JOYSTICKS	-
PADDLES	-

BOOKS

De Re Atari	17 00
Your Atari Computer (inc.XL)	
Mapping the Atari	12 60
Atari Basic Source Book	12 60
Atari XL Handbook	5 95
Techn cal Reference Notes	17 00
Arcade & Graphics Design	12 60
Atari Basic Faster & Better	16 95
Atari User Encyclopedia	17 20

+ 75p post & packing

ADVENTURE

Adventure Quest		9 95
Beyond the Infinite		POA
Cut Throats	(D)	29 95
Deadline	(D)	37 95
Dungeon Adventure	(C)	9 95
Emerald Isle	(C)	6 95
Enchanter	(D)	37 95
Hitch hikers Guide to the Galaxy	(D)	29 95
The Hulk	(C/D)	9 95 / 17 95
Infidel	(D)	39 95
Lords of Time	(C)	9 95
Mask of the Sun	(D)	43 95
Midwinter	(C)	7 95
Sags 1 5	(D)	17 95
Seastalker	(D)	32 95
Sorcerer	(D)	39 95
Starcross	(D)	32 95
Suspect	(D)	37 95
Suspended	(D)	37 95
Wishbringer (Infocom)		JULY
Witness	(D)	37 95
Zork 1 11 111		29 95

MAGAZINES

ATARI USER 1 00 PAGE 6 90
ANTIC 3 50 ANALOG 3 00

SIMULATION

Sublogic F S 11	(D)	44 95
F 15 Strike Eagle	(D)	14 95
Solo Flight	(C/D)	9 95/14 95
Space Shuttle	(R)	19 95
Spitfire Ace	(C/D)	9 95 14 95

FROM THE SOFTWARE FACTORY

MATHS FOR CSE GCE O Level
A set of Five programs (available individually) which not only test prof ciency but also nstruct

Years 1 4 & 5 (Rev sion) c/d each	9 95 / 12 95
Centronics Printer Interface	Soon
Character Editor / Animator	Soon

STRATEGY

Broadsides	(D)	33 95
Colossus Chess 3 0	(C/D)	9 95 / 12 95
Combat Leader	(C D)	14 95
Computer Ambush	(D)	49 95
Cosmic Balance	(D)	33 95
Cosmic Balance 11	(D)	33 96
Eagles	(D)	33 95
Field of Fire	(D)	33 95
Fortress	(D)	29 50
Nato Commander	(C/D)	9 95 14 95
Odessa Chess 7 0	(D)	53 40
Rails West	(D)	62 75
Reforger 88	(D)	45 95
Sargon 11 (Chess)	(D)	16 95

ENTERTAINMENT

BC s Quest for T res	(R)	14 95
Boulder Dash	(C/D)	14 95
Bio Defence	C/D)	9 95 / 14 95
Bruce Lee	(C/D)	14 95
Conan	(D)	14 95
Dig Dug		9 95
Dropzone	(C/D)	9 95 14 95
Decathlon	(R)	19 95
Ghostbusters	(D)	14 95
H E R O	(R)	19 95
Kiss n Kousins	(C)	6 95
Fort App C D		9 95 14 95
Miner 2049 er	(C)	12 95
Mr Do	(C)	9 95
Pac Man	(C)	9 95
Pitfall 11	(R)	19 95
Quasimodo	(C D)	9 95 14 95
Smash Hits 1	C/D	14 95 17 95
Smash Hits 11	C D	14 95 17 95
Smash Hits 111	C D	14 95 17 95
Snokie	C D	9 95 14 95
Summer Games	(D)	33 70

INFOCOMS INVISICLUES

Hitch Hikers Guide	6 95
Cut Throats	6 95
Suspect	6 95

Available Now

ALL OTHER TITLES ALSO AVAILABLE AT THE SAME PRICE

COMING SOON

520 ST C/w Disc Dr ve
B/W Hi Res Mon tor 799 99
Omnitrends Universe & Product Guide
Blue Max 2001
Dambusters
Electrician
Kennedy Approach
New York City

UTILITY

Basic Routines	C/D)	7 95 11 95
Act on	(R)	86 99
Act on Tool K t	(D)	34 99
Basic XL	(R)	69 99
Basic XL Tool Krt	(D)	34 99
DOS XL		34 99
MAC 65	(R)	86 99
MAC/65 Tool Kit	(D)	34 99
Sparta DOS	(D)	39 95

NEW FROM O S S

The Writers Tool (D & R)
State of the Art Word Processor
(So Good M ke s Collared the First One!)
86 99

SEND SAE FOR OUR PRICE LIST.

31 STONEYHURST ROAD
ERDINGTON, BIRMINGHAM B24 8HA

HOTLINE

(021) 384 5080

Column 1				Column 2				Column 3				Column 4			
No	CHR	No	CHR	No	CHR	No	CHR	No	CHR	No	CHR	No	CHR	No	CHR
0	Space	16	0	32	@	48	P	64		80		96		112	p
1	!	17	1	33	A	49	Q	65		81		97	a	113	q
2	"	18	2	34	B	50	R	66		82		98	b	114	r
3	#	19	3	35	C	51	S	67		83		99	c	115	s
4	$	20	4	36	D	52	T	68		84		100	d	116	t
5	%	21	5	37	E	53	U	69		85		101	e	117	u
6	&	22	6	38	F	54	V	70		86		102	f	118	v
7	'	23	7	39	G	55	W	71		87		103	g	119	w
8	(	24	8	40	H	56	X	72		88		104	h	120	x
9	)	25	9	41	I	57	Y	73		89		105	i	121	y
10	*	26		42	J	58	Z	74		90		106	j	122	z
11	+	27		43	K	59	[	75		91	[1]	107	k	123	
12		28	<	44	L	60	\	76		92		108	l	124	|
13	—	29	=	45	M	61	]	77		93		109	m	125	[1]
14	—	30	>	46	N	62	^	78		94		110	n	126	[1]
15	/	31	?	47	O	63	—	79		95		111	o	127	[1]

† In Mode 0 these characters must be preceded with an Escape CHR$(27) to be printed.

Table I Internal character set

over the colour-changing cheat method are that all the colours are available and you can redefine any of the characters All you need to know is the internal character number of the character that you want to change

For a simple demonstration of redefining the heart to something visible change all the 0s in line 150 to 1s

Last month we saw how in Modes 1 and 2 the COLOR command selects the character to be PLOTted By adding 32 to the character we produced a different colour but didn t say where the number 32 came from

Now that we ve seen how to use location 756 we can use the COLOR/PLOT combination to produce multi-coloured messages In order to do this you ll need to use Tables 1 and 2 which are adapted from pages 55 and 56 of the Atari Basic Reference Manual (Note that Table 2 corrects an error in the original)

Find the character you want in Table I If it is in column 1 or 2 it is part of the upper case set If it is in column 3 or 4 it is part of the lower case set Remember that at the level we re operating we can t mix upper and lower case characters

Suppose we want to plot an A in the colour contained in register 0 (orange) Table 1 tells us that A s character number is 33 (column 2) and Table 2 tells us that in order to plot column 2 characters in register 0 colour we must add 32 to the character number

If we d wanted to plot the A in register 3 s colour (purple) Table 2 tells us that we would have to add 192 to the character number

The registers contain their default values but we can alter them using the SETCOLOR command as we saw in the May issue of *Atari User*

To illustrate the use of the conversion factors type in Program 4 while you ve still got Program 3 in memory It overwrites lines 170 and 180 and adds lines 190 220 using the same technique as we used last month

```
170 FOR A=1 TO 10
180 READ X
190 COLOR X
200 PLOT A+5,5
210 NEXT A
220 DATA 65,116,193,242,73,32,.
117,211, 229,82
```

Program IV

		POKE 756,224		POKE 756,226	
Mode 1 or Mode 2	SETCOLOR 0	+32	+32	−32	−32
	SETCOLOR 1	None	+64	−64	None
	SETCOLOR 2	+160	+160	+96	+96
	SETCOLOR 3	+128	+192	+64	+128

Table II Character colour assignment

I ll leave you to play with the actual colours displayed by changing the contents of the registers via SETCOLOR You can get some nice effects with a well-place FOR NEXT loop

Antic ... the reason Atari graphics pack such a mighty punch

MIKE ROWE begins a series on how to produce spectacular displays with an Atari

ONE of the Atari's most renowned and spectacular features is its graphics capability. The machine has 16 different graphics modes and can display up to 16 colours from Basic (256 using machine code).

This is more than any of its rivals and more than many computers costing thousands of pounds. The reason the Atari is able to perform these feats is the inclusion of a chip called Antic to look after screen display.

This is a microprocessor in its own right and runs alongside the 6502 main microprocessor freeing that for the user program. In addition there is the GTIA chip which is also a microprocessor. This creates the famous Atari player-missile graphics and interfaces the computer to the TV display.

For those of you who are new to your Atari the 16 modes consist of five modes that display text and 11 modes that display graphics. These are shown in Figure 1.

You may have noticed that there are two kinds of mode number. Basic and Antic. The Basic number is that used in a graphics call from a Basic program. For example Graphics 0 gives you the standard 40 × 24 text mode.

The Antic mode number is the one stored in memory to be used by the Antic chip to tell it what kind of screen to display. This is calculated from the Basic mode number and stored in the correct location in memory by the computer's operating system – the Antic number of Basic graphics Mode 0 is in fact 2. Using the Antic mode numbers directly without a Basic graphics call will be explained in later articles.

Don't ask me why Atari had to make the two numbers different but they did and we're stuck with it. From now on when I refer to graphics modes I mean the Basic mode and if I want to refer to the Antic mode I will specify Antic.

How does the Antic chip work? A television picture is created by a beam of electrons hitting a fluorescent screen on the inside of your TV.

Basic mode number	Antic mode number	Text or graphics	Number of colours	Columns	Rows full	Rows split	Bytes of memory needed
0	2	TEXT	2	40	24	–	993
1	6	TEXT	5	20	24	20	513
2	7	TEXT	5	20	12	10	261
3	8	GRAPHICS	4	40	24	20	273
4	9	GRAPHICS	2	80	48	40	537
5	10	GRAPHICS	4	80	48	40	1017
6	11	GRAPHICS	2	160	96	80	2025
7	13	GRAPHICS	4	160	96	80	3945
8	15	GRAPHICS	2	320	192	160	7900
9	15	GRAPHICS	1*	80	192	–	7900
10	15	GRAPHICS	8	80	192	–	7900
11	15	GRAPHICS	16	80	192	–	7900
12	4	TEXT/GR	5	40	24	20	1152
13	5	TEXT/GR	5	40	12	10	664
14	12	GRAPHICS	2	160	192	160	4296
15	14	GRAPHICS	4	160	192	160	8138

* = 16 Shades of 1 colour

Note that graphics modes 12 15 are available directly from Basic only on the XLs. They can only be obtained on the 400/800 computers by creating the mode yourself.

Figure 1 Graphics modes

tube (oversimplified) The beam is made to scan horizontally in sequential lines across the screen and the whole screen is covered 50 times a second

A normal TV picture consists of 625 of the lines (in fact it consists of 312 interlacing alternating lines) The computer display to avoid overscanning the TV and losing data consists of only 192 lines leaving a gap at top and bottom of the screen

Antic is able to control each scan line individually and up to 320 individual pixels horizontally A pixel is a single point on the screen created by the computer and therefore the smallest dot it can make

In between each horizontal scan of a line there is a small delay – the horizontal blank Also between each time the screen is drawn there is another delay – the vertical blank More of these later

The higher resolution modes (192 vertical resolution say Graphics 8) use one scan line per horizontal row of the screen However other modes use up to 16 scan lines per line of the graphics mode

The scan lines used are

Basic mode	Vertical resolution	Scan lines/ mode line
0	24	8
1	24	8
2	12	16
3	24	8
4	48	4
5	48	4
6	96	2
7	96	2
8 11	192	1
12	24	8
13	12	16
14	192	1
15	192	1

The next question is how does Antic know what to display? The answer lies in the display list a small machine code program interpreted by Antic to give the display It tells the chip two main things

- The Antic graphics mode number for each line
- The memory location of the screen display

It is normally created and manipulated by the computer s operating system and the Basic programmer can forget it

The whereabouts of the display list



'Stored in a rather complicated way . . .'

is stored in rather a complicated way, in memory locations decimal 560 and 561 because a computer does not work in decimal (base 10) as we do It works in binary numbers (base 2)

These are often expressed as hexadecimal (base 16) – see Mike Bibby s Bit Wise article on Page 46 for an explanation of this

Every memory location in the computer can store a number between 0 and 255 Therefore to express numbers greater than 255 you must use two memory locations So to store a number such as 42000 you must split it into two parts This is done by firstly finding the number of times 256 will divide into it and secondly the remainder

The first number is known as the high byte of the number and the remainder is the low byte They are stored in memory in the order low byte high byte For example for 42000 you get 42000/256=164 remainder 16 The high byte is 164 and the low byte 16

If 42000 was the location of the display list then 560 would contain 16 and 561 would contain 164 (if there is no remainder then 0 must be stored in 560)

Conversely to find where the display list is located you multiply the number in location 561 by 256 and add this to the number in location 560 that is PEEK(561)*256+PEEK(560) gives the location of the display list

Most display lists are very short

Decimal	Hex	
112	70	) 3 lines
112	70	) each of 8 blank
112	70	) scan lines
66	42	=64 (LMS Instruction) +2 (Graphics 0 line)
64	40	) Screen memory location
155	9C	)=64+155*256
2	02	) 23 lines the same
"	"	) i e 23 Basic Graphics 0 lines
65	41	=64+1 End of display list & JuMP to
32	20	) Memory location of start of list
155	9C	)=32+155*256

Figure II Graphics 0 display list

Display List

usually less than 100 bytes The display list used for Graphics 0 is typical and is shown in Figure II

To some extent the display list is fairly self explanatory however a few things need expanding Firstly the LMS instruction This means Load Memory Scan and tells Antic to look at the next two instructions to find where in memory the screen should be displayed from

The above display list has only one LMS instruction but a display list can have several of these pointing to different memory locations and can even have a different LMS for each mode line

Therefore any mode number can be added to an LMS instruction to tell Antic to look for its display data wherever you wish The above display list starts with three lines each of eight blank scan lines to give 24 blank scan lines at the start of the list.

All the standard graphics modes start with this The number 112 ($70) is only one of several blank line instructions

Decimal	Hex	Number of blank scan lines
112	70	8
96	60	7
80	50	6
64	40	5
48	30	4
32	20	3
16	10	2
0	00	1

The end of the display list can be split into three numbers starting with a 65 ($41) This can be divided into 1+64 The 1 tells the display list to jump and the 64 is an LMS telling Antic that a memory location follows The next two numbers are therefore the memory location that the list jumps to in this case the start of the list These two numbers will be the same as in memory location 560 and 561 respectively as they point back to the beginning of the display list

Other instructions may also be included in the list and the following table gives the instruction codes that can be included in a display list by adding it to the Antic mode number We ll see more of these in later articles

Decimal	Hex	Instruction
16	10	Hor zontal scroll
32	20	Vertical scroll
64	40	LMS
128	80	Jump to the display list interrupt

This is all very interesting I hear you say but of what use is it and do I really need to know all this? Well if you are happy to have just the 16 simple modes provided then no!

However much more spectacular and attractive displays become available if you can understand this and know how to alter things to your heart s desires This is done by creating your own custom display list and mixing modes on the same screen and by creating things called display list interrupts

More about these next time

Computer Support PRESENTS

A whole new range of affordable software and hardware products for every Atari user

80 COLUMN PACK £99.95
At last! 80 columns built in to your Atari selectable on powerup works with currently available software

ULTIMON I £49.95
A built in machine code monitor capable of stopping any program on the fly examine alter registers/memory save from disk write to disk return to program and many other commands available A must for all assembly language programmers.

THE GAP £29.95
Fill the 4k gap in your 400/800 with this hardware modification once fitted to a 48k machine there will be 52k of user RAM

ROM EMULATOR £25.95
Develop and debug cartridge software quickly and effectively just flick a switch and cartridge RAM becomes ROM can also be used in conjunction with CARTRIDGE DUPLICATOR to backup those internally protected cartridges then produce a custom copy

OVER WRITE £14.95
Use the other side of all your diskettes simple to operate just flick a switch

BADSECTOR £19.95
A hardware modification. Write bad sectors to any diskette can be used for custom creation of bad sectors or to backup some protected disks

PORTPRINT £25.95
Run a standard centronics compatible parallel printer from the joystick ports of any Atari computer includes a relocatable handler runs with any word processor comes complete with connection lead

SUPER DISASSEMBLER £24.95
Disassemble any disk cassette or cartridge uses system labels separate input to pre determine data bytes the end result file can be customised then re assembled using an assembler

FILE LOADER £14.95
An excellent DOS menu which does not require DOS on the disk deal for games

BOOTLOADER £14.95
A self booting menu compacts boot disks/cassettes to a file format utilities include tape to disk disk to tape disk to disk format write new master

Other items available	Case	Disk
ZAPPING ZOMBIES	£9.95	£7.95
BIORHYTHM	£6.95	£7.95
MAILING LIST		£12.95
UTILITY FACONE ..	£8.95	£8.95
DISK DUPLICATOR		£18.95
DISC DUPLICATOR 128k ..		£18.95
CARTRIDGE DUPLICATOR	£15.95	£16.95
CASSETTE DUPLICATOR	£9.95	£10.95
MACRO LIBRARY (MAC65)*		£12.95
MONITOR CONNECTION LEAD *(Please specify make and model of monitor)*		£9.95
HI-FI CONNECTION LEAD *(Please specify make and model of hi fi)*	..	£4.95
REPLACEMENT AERIAL LEAD		£2.95
SERIAL FLYLEAD (1 metre)		£11.95
SERIAL FLYLEAD (2 metres)		£12.95
SERIAL I/O PLUG		£3.50

Coming soon

128k BANK SELECT
An extra 64k of user memory for the 800XL

EPROM SELECTOR
Select from any one of up to eight eproms from a menu on powerup no odes board and ROM

CARTRIDGE SELECTOR
Select from any one of up to four ready plugged in cartridges.

ULTIMACT
Simply the best macro assembler yet

DOUBLE CHIP
Update your 1050 disk drive to true double density (180k) with switchable default to single or double density

EPROMMER
A very advanced eprom programmer

Send cheque or postal order to

Computer Support
26 Beaucourt Road, Abbey Wood, London SE2 9UW
Tel 01-311 7339

We are continually adding new products to our range please send SAE for full details

Please note Mail Order only

Add 10% for Post & Packing Please allow up to 28 days for delivery

*ATARI is a registered trademark of ATARI CORPORATION
*MACES is a trademark of O.S.S. Inc



AVAILABLE FROM W H. SMITHS, BOOTS, WOOLWORTHS AND MOST COMPUTER RETAILERS OR FROM LLAMASOFT 49 MOUNT PLEASANT, TADLEY, HANTS (TEL 07356 4478) SAE FOR CATALOGUE & NEWSLETTER

'THE NATURE OF THE BEAST'

Get right to th heart of your m

KEVIN EDWARDS shows how to exa machine code by employing a disas er

AT the heart of all the Atari computers, except the ST range, is the 6502 central processing unit, CPU for short, which is responsible for keeping your micro working. It does this by executing complex programs which are contained in memory.

Machine code programs consist of binary numbers each having a different meaning to the CPU. Now we humans aren't much good at making sense of a series of numbers but fortunately a disassembler translates these numbers into assembly language.

It's not exactly the Queen's English but is a lot easier to understand.

The next thing we need to know is the location of the machine code programs which keeps the Atari working — this is known as the operating system or OS.

The OS starts at location 55296 ($D800) and ends at 65535 ($FFFF). So if you're in need of some machine code routines to examine then 55296 is a good place to start.

Don't expect to understand it though. It's fairly complex.

Another large section of machine code program is the Basic interpreter. This can be found in locations 40960 ($A000) to 49151 ($BFFF). No matter what language you program in, it always gets executed by a machine code routine — and you can have a lot of fun trying to fathom out how it works.

Program 1 is the disassembler. Type it in and save it. It uses a simple machine code routine to convert a decimal number into hexadecimal. You can see what it does by disassembling it.

When you run the program the message 'wait a moment' will appear. This is printed while the program reads in the data statements.

After this you will be prompted for the start location. This must be a number between 0 and 65535 (0 and $FFFF).

Let's assume 40960 ($A000) has been entered. The program at the address will be disassembled. You'll get something like this:

```
A000 A5 CA    LDA $CA
A002 D0 04    BNE $A008
A004 A5 CB    LDA $CB
A006 D0 45    BNE $A04D
A008 A2 FF    LDX #$FF
A00A 9A       TXS
```

The first number is the address of the program being disassembled (in hex as with all numbers printed). The next number indicates the instruction type (the command byte). This can be followed by 0, 1 or 2 bytes which give additional information about the instruction — this specifies a memory location or constant used by the command.

Next the mnemonic for the instruction is printed. A mnemonic is an abbreviation for the type of operation the command performs. For example, LDA means LoaD Accumulator and BNE means Branch if Not Equal. If the command byte is invalid three question marks will be printed instead.

After the mnemonic comes the addressing mode. This indicates the way in which the command is to be used. For example, LDA $FF means LoaD the Accumulator with the contents of location $FF. Figure 1 gives a list of the addressing modes available where $XX and $XXXX are hexadecimal numbers.

Not all of the addressing modes are available for each command. This is why large amounts of data are needed to indicate which are valid. It would be much simpler to program if every command allowed every addressing mode.

The program will continue disassembling memory until the end of memory is reached (65535 $FFFF) or the S key is pressed.

Pressing S stops the disassembly and requests another start address. You can stop and start the output from the program by pressing Control-1. This is very useful if you're working your way through a complex routine where you need extra time to think.

When you've finished using the program you can exit by pressing Break.

Let's take a look at how the disassembler works. All of the mnemonics are held in the string *MN$*. The mnemonic data for all the 256 commands are in the array *MNUM(n)* — where *n* is the command number.

So by accessing the array *MNUM* we can find the corresponding mnemonic number for the command. Multiplying this by three results in the offset for the three different mnemonic characters in the string *MN$*. Extracting this from the string

```
#$XX      - Immediate
$XXXX     - Absolute
$XX       - Zero Page
A         - Accumulator
          - Implied (nothing)
($XX,X)   - Pre-indexed indirect
($XX),Y   - Post-indexed indirect
$XX,X     - Zero page,X
$XXXX,X   - Absolute,X
$XXXX,Y   - Absolute,Y
$XXXX     - Relative
($XXXX)   - Indirect
$XX,Y     - zero page,Y
```

Figure 1

the
r micro

ıxa mine the CPU's
ıss embly routine



gives us the desired mnemonic This is done in lines 210 and 220

Next we must find which address ing mode is being used and print it out The addressing modes for the commands are found by examining the array *ADM(n)* – n being the command

One of 13 subroutines is called

```
10 REM D:sassembler
20 REM By Kevin Edwards
30 REM (C) Atari User
40 GRAPHICS 9
45 ?  ? "Wait a moment... ..."
50 DIM MN$(17*3),MNUM(255),ADM(256),OPI
(11)
60 MN$="???BRKORABASLBPLCLCCBCSBVCCLDYCP
XCPYSBCINCDEXINYJMPJSRLDALDXLDYCMPCPXSEC
NESBEQINCDSEDINVJAPJSRLDALDXLDY"
70 FOR I=1 TO LEN(MN$)+1: "LSBBOPORAPPPPP
PLPRLRORRTIRTSSBCSECSEDSEISTASTYSTXTYTA
XTAYTSXTXDINSTYA"
80 FOR LOOP=0 TO 255:READ A:MNUM(LOOP)
=A:NEXT LOOP
90 FOR LOOP=0 TO 256:READ A:ADM(LOOP)=
A:NEXT LOOP
100 FOR LOOP=0 TO 12:READ A:BYT(LOOP)=
A:NEXT LOOP
105 FOR LOOP=1664 TO 1707:READ A:POKE
LOOP,A:NEXT LOOP
110 ? "A"
120 ? "####  D:SASSAWLTER  ####"
130 ? :? "By Kevin Edwards"
140 POKE 764,255
150 ?  ? "Enter start location ";
160 INPUT START
165 IF (START(0) OR (START)65535) THEN
 ? :? "ERROR!ID START!" GOTO 140
170 NUME=START:GOSUB 2010
175 ? "  ";
180 OCD=PEEK(START)
185 IF PEEK(764)=62 THEN GOTO 180
190 A=OCD*(OCD) OPST=BYT(A)
195 IF START+OPST)65535 THEN ? :? "END
 OF MEMORY" GOTO 140
200 FOR LOOP = 0 TO OPST-1:NUME=PEEK(LOO
P+START) GOSUB 2100:? " ";:NEXT LOOP
201 FOR LOOP2=LOOP TO 3:? "   ";:NEXT
LOOP2
210 A=NUM(OCD)*3+1
220 ? MN$(A,A+2);" ";
230 A=OCD*(OCD):OPST=BYT(A)
240 ON A+1 GOSUB 400,1000,1700,500,600
,700,800,900,1000,1100,1200,1300,1400
250 START=START+OPST
260 ?
280 GOTO 170
400 ? "#";:GOSUB 1700:RETURN
500 ? "A";:RETURN
600 RETURN
700 ? "(",:GOSUB 1700:? ",X)",:RETURN
800 ? "(";:GOSUB 1700 ? "),Y",:RETURN
900 GOSUB 1700:? ",X",:RETURN
1000 GOSUB 1300:? ",X";:RETURN
1100 GOSUB 1300:? ",Y";:RETURN
1200 ? "$";
1210 IF PEEK(START+1)>127 THEN NUME=ST
ART-(256-PEEK(START+1)):GOTO 1230
1220 NUME=START+PEEK(START+1)+2
1230 GOSUB 2000:RETURN
1300 ? "(",:GOSUB 1300:? ")",:RETURN
1400 GOSUB 1700:? ",Y";:RETURN
1700 ? "$";
1710 NUME=PEEK(START+1):GOSUB 2100
1720 RETURN
1800 ? "#";
1810 NUME=PEEK(START+1)+256*PEEK(START
+2)
1820 GOSUB 2000:RETURN
2000 REM TWO BYTE REM OUT
2010 B=USR(1676,NUME)
2020 FOR LP=0 TO 7:? CHR$(PEEK(1784+LP
)),:NEXT LP
2030 RETURN
2100 REM ONE BYTE REM OUT
2110 A=USR(1676,NUME)
2120 FOR LP=0 TO 1:? CHR$(PEEK(1784+LP
)),:NEXT LP
2130 RETURN
3000 DATA 13,49,0,0,0,55,3,0,37,35,1,0
,0,10,3,0
```

Program 1

depending on the previous result – see lines 230 and 240. Figure II shows the addressing modes and corresponding numbers used by the array *ADM(n)*.

Another array, *BYT(12)*, indicates the number of bytes taken up by each addressing mode. This is needed so that the program knows how many bytes to print after the address and by how many the memory address is to be incremented.

As I mentioned, the disassembler has its own machine code routine at location 1664 ($680). This is responsible for converting a decimal number into hexadecimal Ascii characters. It is needed because Atari Basic does not support any command to print numbers in hexadecimal.

The rest of the program is quite straightforward.

Now it's up to you. You can begin by disassembling all those brilliant games to see how they work. Certainly one of the best ways to improve your programming is to work out how other people's programs achieve their effects.

```
0 - Immediate
1 - Absolute
2 - Zero Page
3 - Accumulator
4 - Implied
5 - Pre-indexed indirect
6 - Post-indexed indirect
7 - zero page,x
8 - Absolute,x
9 - Absolute,y
10 - Relative
11 - Indirect
12 - zero page,y
```

Figure II

VARIABLES

MN$	String containing the mnemonics
MNUM(255)	Mnemonic numbers for each command byte
ADM(255)	Addressing mode for each command byte
BYT(12)	Number of bytes taken up by each addressing mode
START	Address currently being disassembled
OCO	Command byte for current instruction
A	General purpose
LOOP,LOOP2,LP	General loop variables
OFST	Number of bytes used by current instruction
NUM1	An 8 bit number which is to be printed out in hexadecimal
NUM2	A 16 bit number which is to be printed out in hexadecimal

```
1010 DATA 10,15,0,4,0,15,1,0,14,15,8,0
,0,35,2,0
1020 DATA 23,1,0,0,7,1,40,0,13,1,40,0,
7,2,40,0
1030 DATA 6,2,0,0,0,1,44,0,45,2,0,0,0,
1,40,0
1040 DATA 42,24,0,0,0,24,33,0,30,24,53
,4,30,24,53,0
1050 DATA 12,24,0,0,0,24,33,0,16,24,0,
0,0,24,33,0
1060 DATA 45,1,0,4,0,1,41,0,30,1,41,0,
28,1,41,0
1070 DATA 11,1,0,0,0,1,41,0,47,1,0,0,0
,1,41,0
1080 DATA 0,40,0,0,50,48,45,0,23,0,84,
0,50,44,49,0
1090 DATA 4,48,0,0,50,48,45,0,54,48,55
,0,0,44,0,0
1100 DATA 37,30,31,0,32,30,31,0,52,30,
57,0,32,30,31,0
1110 DATA 5,10,0,0,32,10,31,0,17,30,53
,0,32,30,31,0
1120 DATA 20,10,0,0,20,10,31,0,37,10,2
2,0,20,10,31,0
1130 DATA 9,10,0,0,0,10,31,0,15,10,0,0
,0,10,31,0
1140 DATA 13,44,0,0,19,44,25,0,26,44,3
4,0,13,44,25 0
1150 DATA 0,44,0,0,0,44,25,0,46,44 0,0
,0,44,25,0
1200 DATA 6,5,4,4,4,2,2,0,4,0,1,4,4,1,
1,4
1210 DATA 10,0,4,4,4,7,7,4,4,5,4,4,4,0
,0,4
1220 DATA 1,1,4,4,3,3,3,4,4,0,3,4,1,1,
1,4
1230 DATA 10,6,4,4,4,7,7,4,4,5,4,4,4,0
,0,4
1240 DATA 4,5 4,4,4,3,2,4,4,0,5 4,1,1,
1,4
1250 DATA 10,6,4,4,4,7,7,4,4 5,4 4,4,0
,0,4
1260 DATA 4,5,4,4,4,2,2,4,4,0,2,4,11,1
,1,4
1270 DATA 10,6,4,4,4,7,7,4,4,5,0,4,4,0
,0,4
1280 DATA 4,5,4,4,2,2,2,4,4,4,4,4,1,1,
1,4
1290 DATA 10,6,4,4,7,7,12,4,4 5,4,4,4,
0,4,4
1300 DATA 0,5,0,4,2,2,3,4,4,0,4,4,3,1,
1,4
1310 DATA 10,6,4,4,7,7,12,4,4,5,4,4,0,
0,2,4
1320 DATA 0,5,4,4,3,3,2,4,4,0,4,4,1,1,
1,4
1330 DATA 10,6,4,4,4,7,7,4,4,5,4,4,4,0
,0,4
1340 DATA 4,5,4,4,3,2,3,4,4,0,4,4,1,1,
1,4
1350 DATA 10,6,4,4,4,7,7,4,4,5,4,4,4,0
,0,4
1400 DATA 2,3,3,1,1,3,2,3,1,1,2,3,3,2
1500 DATA 162,0,134,134,33,144,6,134,2
6,166,6
1510 DATA 202,0,134,134,134,72,74,74,7
4,74,32,159,6
1520 DATA 104,41,15,240,10,144,2,105,6
,133,48
1530 DATA 157,160,6,232,96
```

Tired of typing?
Take advantage of our finger-saving offer on Page 61.


THE Only REALISTIC
BASKETBALL
ACTION PROGRAM FOR YOUR
NOW
AVAILABLE ON
SPECTRUM 48K
AMSTRAD CPC464
ATARI 600/800XL
NO. 2. U.S. HIT
OUT NOW ON CASSETTE & DISK
ONE-ON-ONE
Basketball fans should love this simulation of the game — it has some of the most lifelike animation ever seen in a sports game —
To see your player spin 180 degrees, dribble past the defender and shoot close in, gives a vicarious thrill quite unmatched in any other sports simulation I've seen
All this adds up to one heck of a great game.
Bob Chappell
Personal Computer News
HIT!
Fast Load Chrome Tape
A Basketball Action Simulation for the COMMODORE 64
THIS PROGRAM HAS BEEN PERSONALLY REVIEWED BY TOP U.S. BASKETBALL SUPERSTARS DR JULIUS ERVING & LARRY BIRD AND IS BASED ON THEIR REAL GAME MOVEMENTS
INCLUDES SPECIAL DISCOUNT VOUCHER
FEATURES ● PLAY THE COMPUTER OR A FRIEND ● 4 SKILL LEVELS ● BUILT IN FATIGUE FACTORS – HOT & COLD STREAKS – FOULS – A STOP CLOCK – AND A REFEREE ● INSTANT ACTION REPLAY ● JOYSTICK CONTROL ● ●
*and keyboard on trial Spectrum & Amstrad versions
AVAILABLE FROM ALL GOOD SOFTWARE RETAILERS –
HIGH PERFORMANCE PROGRAMS

BOMB RUN



OLO favountes are always the best, so here s one of the oldest – Bomb Run. It's a fast, colourful, exciting Atari version of one of the classics.

Your plane is running out of fuel and losing altitude at an alarming rate and there's nowhere to land. The only solution is to flatten the deserted city below and create a landing strip using your cargo of bombs.

The controls of your plane have lost power and no longer function, but pressing the spacebar will release a single bomb. When it's exploded the next can be dropped.

There's a lively tune to accompany the instructions page and appropriate sound effects during the main game. Level 1 is the easiest and if you manage to land you start again on the next level with even taller buildings. The highest score is remembered, so there's always the challenge of trying to beat your best.

Bombing the deserted city to make a landing strip is your only hope of survival in this exciting arcade-style challenge

by ROLAND WADDILOVE



Program Notes

The program is fairly well structured so shouldn't be too difficult to follow. Each subroutine has been given a title describing its function and there are few GOTOs.

The character set is copied down into RAM so that some of the characters can be redefined. The pointer to the character data at 756 is poked with the new value – the high byte of the start of the data.


The plane and bomb aren't printed. They are poked directly into the screen memory which starts at 40320 in graphics mode 1. Also the screen memory is peeked to find out what is in front of the plane and below the bomb.

Peek(764) is used to read the keyboard. This is poked with 255 if there is already a bomb dropping in order to reset it.

Variables

- **B** Bomb position
- **C** Character below bomb
- **E** Number of storeys of building exploded
- **H** High score
- **I,J** Loop counters
- **L** Level
- **P** Plane position
- **S** Score

Full listing starts on Page 34

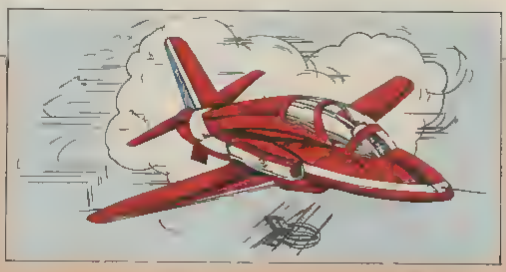

```
10 REM Bomb Run
20 REM By R.D Maddelove
30 REM (C) Atari User
50 GOSUB 8000:REM instructions
100 GOSUB 9000:REM graphics
110 S=0:L=0
120 GOSUB 5000:REM Screen
200 GOSUB 1000:REM Plane
200 GOSUB 1500 REM bomb
300 IF PEEK(P+1) THEN 400
320 IF P(40730 THEN 200
380 GOTO 120
400 GOSUB 6000 REM boom
450 GOTO 110
500 END
1000 REM Move plane
1100 P=P+1
1110 POKE P,1:POKE P-1,2 POKE P-2,0
1400 RETURN
1500 REM Bomb
1502 FOR I=0 TO 15
1504 IF A INCA A=A+0 S:SOUND 1,A,10,8
1506 NEXT I
1510 IF A=0 THEN 2000
1520 POKE 764,255
1560 B=B+20:C=PEEK(83
1570 IF C=6 THEN POKE B-20,0:POKE B,19
5:RETURN
1600 IF C=6 OR C=5 IOEO SOUND 2,0,0,0
SOUND 1,0,0,0:POKE B-20,0 B=0:GETORN
1680 SOUND 2,100,0,10
1700 E=E+1 S=S+L
1710 POKE B-20,0:POKE B,195
1740 POSITION 6,23:? #6;S;
1900 GETORN
2000 REM Hee bomb?
2010 IF PEEK(764)<>33 IOEO FOR I=0 TO
40:NEXT I:RETURN
2020 B=P+20:E=0:H=10
2030 IF PEEK(B))0 THEN B=0:RETURN
2080 POKE B,156:SOUND I,H,10,8
2200 GETORN
8000 REM Draw screen
5000 L=L+1
5100 POSITION 0,23:PRINT #6;"Score ";S
;"  ";
5110 POSITION 10,23:PRINT #6;"Level:";
L;
5120 POSITION 0,21:PRINT #6;"##########
##########"
5130 FOR I=1 TO 10
5135 SOUND 0,150+INT(100*RND(1)),10,6
5140 FOR J=0 TO INT(200*((1)*(L+6))
5150 POSITION 1,20-J PRINT #6,CHR$(16+
128)
5155 FOR K=1 TO 5:NEXT K
5160 NEXT J
5170 POSITION 1,20-J:PRINT #6;CHR$(32+
128)
5180 NEXT I
5190 P=40321:POKE P-1,2:POKE P,1
8200 B=0:POKE 764,255
5210 SOUND 0,80,4,1
5800 RETURN
6000 REM Bang
6002 SOUND 0,0,0,0:SOUND 1,0,0,0 SOUND
 2,0,0,0
6000 FOR J=1 TO 1
6004 SOUND 0,INT(200*RND(1)),0,15
6006 FOR I=0 TO 10 NEXT I
6010 SETCOLOR 4,0,12
6020 FOR I = 0 TO 10 NEXT I
6030 SETCOLOR 4,7,1
6035 NEXT J
6040 POKE P,0:POKE P 2,7
6050 FOR I=0 TO 1000:NEXT I
6055 SOUND 0,0,0,0
6060 FOR I=0 TO 10
6070 POSITION 0,1:PRINT #6;"
          ";:REM 10 spaces
6080 NEXT I
6090 IF S>H THEN H=S
6100 POSITION 3,0.PRINT #6;"Best score
:";H
6120 POSITION 4,10:PRINT #6;"PRESS SPA
CE"
6130 POKE 764,106
6140 IF PEEK(764)<>33 THEN 6140
6160 FOR I=0 TO 20
6170 POSITION 0,1:#6;"
          ";:REM 20 spaces
6180 NEXT I
6200 GETORN
8000 REM Instructions
8005 H=0
8010 GRAPHICS 0:SETCOLOR 4,3,2:SETCOLO
R 2,0,9 SETCOLOR 1,0,0
8020 POSITION 10,1:PRINT "# # # N #    #
  U #"
8030 ? :? "Your plane is running out o
f fuel and"
8035 ? :? "needs to land.  Press the space bar T
o release a bomb"
8060 ? :? :? "Press the space bar t
o start  .";
8090 POKE 764,255
8100 I=1 RESTORE 8000
8105 J I=READ A1,A2,A3,A4,A5
8106 IF A5=0 THEN 8100
8110 IF I=1 THEN SOUND 0,A1,10,7:SOUND
 1,A2,10,3.SOUND 2,A3,10,1
8120 IF I=5 THEN SOUND 0,A4,10,7
8130 IF I=10 IOEO SOUND 0,A5,10,7
8166 I=1+I:IF I>15 THEN I=1:J=J+1
8180 IF PEEK(764)=33 THEN RETURN
8190 IF J=4 TOEN 8100
8200 RNTO 8110
8400 DATA 72,217,172,81,45
8410 DATA 64,162,217,52,40
8420 DATA 57,144,210,47,38
8430 DATA 64,162,120,52,40
8440 DATA 0,0,0,0,0
9000 REM Graphics
9001 GRAPHICS 17:SETCOLOR 4,7,1:SETCOL
OR 0,2,10:SETCOLOR 1,0,14:SETCOLOR 2,9
,10:SETCOLOR 3,10,14
9002 POSITION 5,5 PRINT #6;"THINKING.
."
9010 SOUND 0,0,0,0:SOUND 1,0,0,0:SOUND
 2,0,0,0:SOUND 3,0,0,0
9050 FOR I=0 TO 1013
9060 POKE 16384+I,PEEK(57344+I)
9070 NEXT I
9080 GESTNEX 9100
9100 DATA 0,192,209,253,15,11,253,33
9110 DATA 192,224,240,255,248,240,248,
128
9120 DATA 60,60,24,60,126,126,60,24
9130 DATA 254,146,146,254,198,186,186,
254
9140 DATA 16,16,60,124,254,170,170,254
9145 DATA 255,255,255,255,170,85,170,0
5
9146 DATA 6,4,5,147,244,100,112,80
9147 DATA 224,72,144,200,63,19,70,80
9150 FOR I=0 TO 60
9160 READ J POKE 15392+I,J
9170 NEXT I
9200 POKE 200,64
9452 POSITION 5,5:PRINT #6;"
 "
9500 RETURN
```

Tired of typing?
Take advantage of our finger-saving offer on Page 61.

UNBEATABLE BARGAINS ! !

SJB SUPERSAVERS

ATARI 800XL + ATARI 1050 DISK DRIVE

Only £239.95

(including Home Filing Manager (disc) and Pay Off Adventure (disk)

ATARI 800XL + ATARI 1010 RECORDER

Only £124.95

(including Pole Position (cass) and Intro to Programming (cass)

ATARI 800XL

Only £79.95

ATARI 1050 DISK DRIVE

Only £169.95

* *

BLANK DISCS

	Single side/Double density	*Double side/Double density*
Scotch/3M	£14 95	£19 95
Dysan	£17 95	£24 95
Memorex (with free case)	£12.95	£17.95

SJB SUPERSAVERS ! !

50 Memorex Single side/Double density Blank Disks in a perspex storage box

only £59.95

50 Memorex Double side/Double density Blank Discs in a perspex storage box

only £79.95

All prices inclusive VAT
P&P is FREE in UK

Please send Cheques/PO s to

SJB DISK SUPPLIES

DEPT. (A.3.), 11 DUNDLE DRIVE,
WOLLATON PARK, NOTTINGHAM NG8 1BN
Tel: (0602) 782310

WE already know how skilled and creative Atari users are, and we look forward to receiving your programs and articles for publication in future issues of *Atari User*. However before you send your masterpiece off to us there are one or two points that you ought to bear in mind to make all our lives easier. We call them the seventeen commandments . . .

The Seventeen Commandments

WHILE not wanting to put programmers creativity into a straightjacket we've found that life can be made a lot easier for the magazine our readers and the programmers themselves if we stick to certain standards

It has also occurred to us that it's no good our just knowing what we want we have to tell you our potential contributors So here are our 17 commandments Don't be too daunted by the list – it's mostly just commonsense and good programming practice

● Send us your programs on tape or disc There's no point in just sending a listing and asking if we're interested You can't expect us to evaluate a program from merely reading a listing We may be good but we're not that good! A cassette or disc with the program on is a must

We don't use two part programs in the magazine Games in two files may look professional but they're the kiss of death as far as the magazine is concerned Too much can go wrong when people type them in

● Avoid variables names that lead to confusion such as l and 1 O and 0 and try to use meaningful variable names as well – ALIENS is far more understandable than AL

● Tell us what the program is supposed to do and refer to it by name You'd be amazed at the number of programs we get where the author forgets to tell us what it is all about

In any subsequent correspondence reference to my program can cause problems by its vagueness Okay we'd have the program on record somewhere but life would be a lot easier all round if its author were less modest and admitted he was the genius behind Mega-invaders

● Label everything with both the program's name and your own name and address And put the word ATARI on it somewhere You won't appreciate the reason for this until you produce as many magazines as we do Keep your own copy of it too So far the only existing copy of one particular classic game hasn't disappeared in the post – but there's no reason to run the risk of yours being the first

If it's a game let us know how to cheat so we can test out the higher levels We're getting on a bit here and our reactions aren't as good as they used to be (Not that they were up to much when they were as good as they used to be)

And an adventure-type game or whatnot should come with a map of the rooms and any other cnb sheet you possess Much as we'd like to we just don't have time to guess the name of Rumplestiltskin's brother no matter how much we admire your ingenuity (Anyway he works in our artroom)

● Put more than one copy of the program on your tape or disc And if you want the cassette or disc back let us have a stamped addressed envelope with the name of the program on it

You won't appreciate this unless you've run a computer magazine but please send each different program on a different cassette or disc If not we just can't handle them The rule is one program per cassette or disc – though recorded several times on it

● Let us have a printed listing if possible Screen dumps or off-screen photos are much appreciated though not vital Diagrams are always of use Often a point that's difficult to put into words becomes clear as crystal when you sketch it out

● Give a description of the program what it does why you wrote it and outline the way it works and its variables and subroutines

If it's a game let us have a plot You'll get an idea of the sort of thing we want by reading the introductions to one or two of our games

Maybe you could also give a few ideas for its improvement or expansion Even if you can't get your upgrades to work there's a good chance that someone among our very talented readers will

Every subroutine ought to be titled clearly with a REM and should be referred to by it Again make the title meaningful Also when you GOSUB use a REM to indicate which subroutine you're using For example

```
100 GOSUB 1000  REM Move man
.
.

1000 REM **** Move Man ****

1100 RETURN
```

At first this may seem to be far too much fuss but it's not just for the readers benefit As your programs grow you'll find that such REMs more than repay the effort by allowing you to keep track of your work

When you write out your list of subroutines (vital) try to do it in the form

```
100 example  Shows how we
             want
200 delay  Holds things up  .
```

where the line numbers refer to the

lines where the subroutine is defined Again this helps by making things clearer to our readers – and you!

We don't expect your program descriptions to be classics of English literature but it does help if they make sense and are easy to follow Try reading them out loud – you'd be amazed how much such a simple technique can improve your writing

Also if you get stuck to put something into words try this trick tell someone what it is you're trying to put into words – then write it down Before you reject this hint try it – more than one professional writer owes his career to it

● It is good practice to number your program starting at 10 in increments of 10 This way a missing line stands out like a sore thumb

● Make sure that the program actually works Try it out on your friends for their criticism (painful though it may be) The acid test is to ask them to type it in And – when you find yourself muttering through clenched teeth How could anyone be that stupid? (the answer is regularly) – cast out the mote in your own eye and alter your program to take account of the feedback

It's not easy to do as the all-too frequent blood feuds among the editorial staff here testify but it's worth it

Instructions can make or break a game Make sure that your's really do instruct They should be complete and it helps if the spelling and grammar are correct Apart from causing confusion such errors also make programs look amateurish

As well as misspellings bad grammar split words and general untidiness are all to be avoided

Following even the simplest program can cause problems for the most experienced programmer – don't add to them unnecessarily

● Please do put lots of nice explanatory REMs in your programs A couple of REM statements with nothing after them at the beginning of the program gives us room to put in our messages without messing up all the line numbers you have referred to in your program description

● Double space all your written matter This means leaving a blank line between each line of text – it's vital from our point of view Try to follow our style We have our own ways of doing things We talk about modes in general but Mode 1 in particular We press the Return key not the RETURN key as you might expect

Just look how we do it in the magazine Our programs are Program I Program II and so on our diagrams Figure I Figure II

● Try to avoid long multiple lines if you can Remember people will be spending hours typing your programs into their micros and long lines are harder to debug

If you follow these rules when you submit a program you'll stand a better chance of having it published

● Please when you send us your work include a separate page telling us that it is your own work it has not been offered elsewhere and we have your permission to print it If you don't we'll have to return it

● It's always nice if a program can have an alternative key or joystick option

● One of the major causes of programs crashing is because the user inputs something the programmer wasn't expecting All right the idiot shouldn't type in –999 when you ask him his age but believe me they will out of sheer perversity – particularly if the program is educational There is something about CAL programs that brings out the devil in us all

So try out all the unlikely options – if you don't some poor user will

Actually it takes a lot of skill to idiot proof a program as it's delicately known in the trade

Often you're so involved in getting the program to work as it's supposed to that you just can't make the mental leap needed to see it as the passively malevolent reader does So try it out on your friends!

● Another irritation for a reader is when he sees something like

```
PRINT"     "
```

Exactly how many blanks is he supposed to enter?

Use

```
PRINT'     ":REM 4 BLANKS
```


● Tell us who you are We like to know your Christian name and also it's interesting to know your age and profession After all we might reject your program but if we knew you were a fetlock fettler we'd have been able to send you Obscuresoft's Fettling fetlocks on the Atari for review

Also a telephone number – both home and work – with the correct STD code is really useful and can save a lot of time

Thus endeth the 17 rules If you follow these when you submit something to us you'll stand a much better chance of having it published More importantly you'll become a far more professional programmer

And the better you become the more satisfying it is

Contributions should be sent to Features Editor Atari User Europa House 68 Chester Road Hazel Grove Stockport SK7 5NY



Tickle the ivories..

TURN your Atari into a simple electronic organ with this easy-to-enter Basic program from W N HOLTON When you run it, the A to keys become the white notes while W, E, T, Y, U, O and P supply the blacks

In no time at all you'll be playing your own Atari masterpiece and, if you're feeling ambitious, you could even supply a graphics keyboard. Let's see (or is it hear?) your creations at *Atari User* Sounds like it might be fun.

```
1 REM ATARI KEYBOARD
2 REM BY W.N.HOLTON
5 PRINT CHR$(125)
10 A=PEEK(768)
20 IF A>256 THEN 10
30 A=0
60 POKE 756,255
64 RESTORE 350
80 IF A=63 THEN N=120:GOTO 250
70 IF A=62 THEN N=108:GOTO 200
80 IF A=58 THEN N=96:GOTO 250
90 IF A=60 THEN N=92:GOTO 200
100 IF A=61 THEN N=81:GOTO 250
110 IF A=57 THEN N=72:GOTO 250
120 IF A=1 THEN N=66:GOTO 250
130 IF A=5 THEN N=60:GOTO 250
140 IF A=8 THEN N=53:GOTO 250
150 IF A=2 THEN N=47:GOTO 200
200 IF A=46 THEN N=224:GOTO 250
170 IF A=42 THEN N=202:GOTO 200
180 IF A=45 THEN N=85:GOTO 250
190 IF A=63 THEN N=76:GOTO 250
200 IF A=12 THEN N=68:GOTO 250
210 IF A=8 THEN N=57:GOTO 250
220 IF A=10 THEN N=50:GOTO 250
250 GOTO 10
260 READ X
270 SOUND 0,X,14,8
280 IF PEEK(706)<255 THEN GOTO 10
290 N=N+1 IF N<48 THEN 260
300 POKE 706,255:GOTO 10
350 DATA 0,0,0,
```

Atari DOS 2.5

Taking a long hard look at Atari's new operating system, ANDRE WILLEY reports that it's very friendly and makes the most of enhanced density's extra storage space

BEFORE telling you about Atari's new DOS, let's first explain for cassette owners what DOS is. It stands for Disc Operating System, and its job is to handle the storage of information on disc.

When you store anything on cassette you can just use CSAVE and CLOAD and the computer will do the rest. So why the need for an extra DOS for disc drives?

The reason is one of memory. The disc handlers have lot a more work to do than the cassette handler and therefore take up about 9k of memory.

Atari decided quite reasonably that owners who had only a cassette recorder would be more than a little upset at losing an extra 9k for something that they would never use. Thus DOS is stored on disc and will automatically load into the computer when you switch on.

Atari have released three versions of DOS so far and a fourth is now available. DOS 1.0 took up 9k of memory and was soon replaced by DOS 2.0. This has a core of 5k which loads into memory on power-up and a menu taking up a further 4k which only loads when you type "DOS".

DOS 2.0 has become the standard for all third-party DOS manufacturers and was well established when Atari came along with the new 1050 drive and the all-new DOS 3.

This offered extra storage space but was very poorly received because it was clumsy to use, incompatible with DOS 2.0 discs and very wasteful of space. Even a spokesman from Atari admitted that it was a bit of a dog.

Thankfully Atari have backed down and called in Bill Wilkinson of Optimized Systems Software to write a revised version of DOS 2.0 to handle enhanced density.

OSS were responsible for the original Atari DOS, Basic and Assembler/Editor Cartridge and have since upgraded these products themselves into the excellent DOS XL, Basic XL and Mac/65.

They have also released what I consider to be simply the best language available for the Atari – Action! Thus the news that OSS were doing DOS 2.5 hit the Atari community in much the same way as the music world would take the news that the Beatles were re-forming.

I have been using a pre-release copy of DOS 2.5 for about a month now and it seems to do all that's claimed for it. It is very user friendly without being tedious to use, completely compatible with DOS 2.0, and capable of using the extra storage space of enhanced density. The main menu will prompt you with the following one-letter commands:

- **A.** *Directory of files on disc*
- **B.** *Return to Basic (or cartridge)*
- **C.** *Copy file(s) from one drive to another*
- **D.** *Delete file(s)*
- **E.** *Rename file(s)*
- **F.** *Lock file(s)*
- **G.** *'Unlock' file(s)*
- **H.** *Write DOS files to disc*
- **I.** *Initialise disc (format)*
- **J.** *Make duplicate copy of a disc*
- **K.** *Save a block of memory (not Basic programs)*
- **L.** *Re-load a saved memory block*
- **M.** *Run a machine code program*
- **N.** *Make a MEM.SAV file (see below)*
- **O.** *Duplicate file(s) on single drive*
- **P.** *Format (single density only)*

DOS 2.0 owners will recognise all but the last option, though some of the others have been slightly altered. Drive density is automatically selected which means that when you type I for Initialise disc the computer will detect whether you have a drive capable of enhanced density and format the disc accordingly.

Should you wish a disc to be formatted for later use on an old 810 drive option P will format a disc in single density regardless of the drive type. Whenever you load a formatted disc into a 1050 drive it will sense the type – so discs can be swapped about as you wish.

The duplicate disc option (J) will format the new disc before copying, thus ensuring an accurate copy no matter what density the original was.

recorded in

One interesting point is that any files you create on an enhanced density disc which would be beyond the end of a DOS 2.0 single density disc will show up with < > brackets around the filename meaning that they will be invisible on a DOS 2.0 directory

Getting a directory (list of files) from your master disc will show the following

```
* DOS      SYS 037
* DUP      SYS 042
* RAMDISK  COM 009
* SETUP    CDM 070
* CDPY32   CDM 056
* DISKFIX  CDM 057
* DDSMAN       019
* MINIMAN      147
573 FREE SECTORS
(Or 270 FREE SECTORS in
single density)
```

The asterisks before each filename indicate that all of the files are *locked* which simply means that DOS will not allow you to delete them without first telling it to unlock them again

The numbers after each name tell you how many sectors long that particular file is – one sector is the smallest length a file can be and can contain up to 128 bytes. Thus the file RAMDISK.COM takes up 1152 (or 9 times 128) bytes of disc space

In enhanced density a disc has a total of 1010 sectors available which the directory shows as 999+ to ensure compatibility with DOS 2.0. In single density mode you will get the same amount of free space as with DOS 2.0 – 707 sectors

The file DOS.SYS which somewhat surprisingly is two sectors shorter than on DOS 2.0 is the segment of DOS that loads on power-up and DUP.SYS is the segment called up when you type DOS

This has the disadvantage that when you call DOS on either DOS 2.0, 2.5 or 3 your program will be lost. Therefore you must either SAVE your program before calling DOS or put a MEM.SAV file on your disc – using menu option N – which will automatically save the program for you before DOS is called and restore it again afterwards

The other files on the master disc are a series of useful utilities. The most interesting of these is RAM DISK.COM. This allows you to use the extra 64k RAM on the 130XE in the same way as you would normally use a second disc drive

The advantage of this is that it is dozens of times faster than a disc drive and with DUP.SYS and MEM.SAV set up on the RAMDISK (which is handled by RAMDISK.COM) calling DOS is virtually instant (see Table I)

You get a total of 499 sectors on this disc and it is perhaps the most powerful and useful feature of DOS 2.5. The catch – there's always one isn't there? – is that the contents of RAM are lost when you switch off the computer which means that you must always finish a session by copying anything that you want to keep back on to a real disc

SETUP.COM allows you to change the system configuration – number of drives allowed, buffer areas, read-after write verify mode and so on. It can also create an AUTORUN.SYS file for you which will run a Basic program and/or set up the RS-232 handlers for modem use when you boot the disc

COPY32.COM is a utility which will allow you to transfer files from a DOS 3 disc back on to DOS 2.5. It will allow you to view the directory of the DOS 3 disc first and then choose which files to copy

DISKFIX.COM is a handy little program which is designed to get you out of trouble if you do something silly to a disc. It is more than a little frustrating to find that in a fit of temper your little brother has just erased the last three months' work on your latest Space Invaders program. Thankfully DISKFIX allows you to un-erase the file again – while you un-erase your brother

On DOS 2.0 and 2.5 the rename option would allow you to give two files the same name. This was fine until you wanted to separate them again and you found that if you tried to delete-rename, copy – or anything else – one file then both would be affected. DISKFIX allows you to give both files different names again

Another problem can occur if you Break out of a disc write which can corrupt the VTOC Table. In plain English DOS might not know how many free sectors the disc has and even if you could only see a couple of files on the directory DOS may show considerably fewer free sectors than it should – thus reducing the amount of data you can store

DISKFIX will verify each file on the disc, check its length and re-calculate the correct amount of space

The last two files on the disc contain an AtariWriter document and a Basic program for those without a printer. These will print a copy of an 11-page Mini-Manual to DOS 2.5 giving details on general use, compatibility with other DOSs and the use of the utility files

The icing on the cake as far as this 'Super-DOS' goes is that you can get it free. If you contact Atari's Help-Line (Monday-Saturday during office hours on 01 309 7770) they will give you the details of your

DOS TYPE	Initial Load time to Basic
DOS 1	15
DOS 2	10
DOS 2 with MEM.SAV	10
DOS 3	12
DOS 3 with MEM.SAV	12
DOS 2.5	10
DOS 2.5 with MEM.SAV	10
DOS 2.5 (130XE) MEM.SAV in RAMDISK	18
DOS-XL	13
DOS-XL with Basic-XL	24

Table I: DOS Comparisons

nearest user group or retailer who will be able to put DOS 2.5 on to a blank disc for you.

Atari will NOT be selling it as such and you will not be charged for it – though you can expect to be charged for the blank disc if you don't provide your own.

From this month Atari should have available a full 150-page manual giving far greater details of the more technical aspects and this will cost in the region of £10-£12.

Any disc drives shipped from Atari after July will also contain DOS 2.5 and the full manual. However, if you've already got a disc drive and you're currently using DOS 3, then you should think very seriously about shifting to 2.5 as soon as you can get your hands on a copy.

I've provided some comparisons between the various DOSs in Table I. In a future issue of *Atari User*, I'll begin a closer look at how DOS 2.0 and 2.5 work, and how they actually store information.

The icing on the cake is that you can get it free!

Time to load DOS commands	Time to return to Basic	Free memory from Basic (bytes)	Maximum disc capacity (formatted)	Disc capacity after main DOS file(s) written
0	0	28 814	90 752	82 560
7	0	32 274	90 436	80 128
32	2	32 274	90 456	74 368
6	0	32 274	130 048	115 808
12	8	32 274	130 048	114 688
7	0	32 418	125 280	112 168
32	3	32 418	125,280	113 408
Less than 1 sec	Less than ½ sec.	32 274	125 280 +RAMDISK 93 872	118 016 +RAMDISK 52 736
0	0	30 990	90 496	84 608
0	0	37 134	90,496	78 720

All timings in seconds, with a 1050 drive running single density discs on a 130XE. Disc capacity after main DOS files have been written, but NOT including various optional DOS files, enhancements etc. Basic-XL and DOS-XL can use extra memory management to give much more user RAM. Normal free memory (no DOS) = 37 902 bytes.



1ST ON MERSEYSIDE FOR ATARI

U.S MAGS & SOFTWARE

130 XE NOW AVAILABLE!!

RELIABLE MAIL ORDER SERVICE

- SOFTWARE FROM ALL THE BEST SUPPLIERS OVER THE COUNTER
- BOOKS & ACCESSORIES
- GAMES, EDUCATION & PROGRAMMING AIDS
- LATE NIGHT OPENING MON-SAT UNTIL 8PM
- SEE IT & TRY IT BEFORE YOU BUY IT






Microbyte

71 SEAVIEW ROAD WALLASEY

HAVE YOU GOT YOUR COPY OF THE BEST CLUB MAGAZINE IN BRITAIN?



Filled from cover to cover with

- *Galvanising Games*
- *Tantalising Tutorials*
- *Mind-boggling Machine Code*
- *Lotsa Listings*
- *Topical Tips*
- *Realistic Reviews*

Send a cheque P O for £4 00 made payable to the U K Atari Computer Owners Club for your four issues subscription now Or send £1-30p (which includes P&P) for a sample copy to see what the magazine offers

Don't delay do it today!!

THE U.K. ATARI COMPUTER OWNERS CLUB

ATJ **P.O. Box 3, Rayleigh, Essex.**

Independent User Group

ONE of the first things you have to think of when you log onto Telecom Gold is a password. The trouble is that it's not easy thinking of one that's simple to remember yet hard for someone else to guess.

So this month we'll be looking at a program that uses the Atari's string handling capabilities to do our thinking for us.

```
10 REM PASSWORD GENERATOR
20 REM TREVOR ROBERTS
30 OPEN #1,4,0,"K"
40 DIM PASSWORD$(10):DIM SET$(26):DIM
PICK$(1)
50 PRINT "How many letters";
60 INPUT NUMBER
70 IF NUMBER<6 OR NUMBER>10 THEN GOTO
50
80 SET$="ABCDEFGHIJKLMNOPQRSTUVWXYZ"
90 FOR LOOP=1 TO NUMBER
100 GOSUB 200
110 NEXT LOOP
120 PRINT :PRINT "ONE POSSIBILITY IS "
;PASSWORD$
130 GOSUB 300
140 IF FINISH=1 THEN GOTO 50
150 PRINT :PRINT "Your choice is ";PAS
SWORD$
160 END
200 REM PICKS ONE LETTER FROM SET$
210 PICK$=SET$(INT(RND(0)*26+1))
220 REM ADDS IT TO GROWING PASSWORD
230 PASSWORD$(LOOP)=PICK$
240 RETURN
300 REM KEYBOARD INPUT
310 PRINT :PRINT "DO YOU  LIKE THIS PA
SSWORD? ENTER Y/N"
320 GET #1,ANSWER:IF ANSWER<>89 AND AN
SWER<>78 AND ANSWER<>121 AND ANSWER<>1
10 THEN GOTO 310
330 IF ANSWER=89 OR ANSWER=121 THEN FI
NISH=1
340 RETURN
```

Micro Scope



No. 3 Password provider

10,20 These are just REMs telling humans what the program is called and who wrote it

30 Opens the keyboard up as a means of input while the program is running. We'll be using this in the subroutine that starts at line 300

40 Dimensions three string arrays

50,60 Ask for the number of letters you want in the password and store your reply in *NUMBER*

70 An example of what's known as a mugtrap. Here the comparisons make sure that you don't want a password with either a negative number of letters or more than 10. If you do you're asked again until you give a number that's in range

50 Uses *SET$* to hold the letters that the password will be picked from. Here they are the alphabet. The more cryptically minded could use other selections of letters

80-110 Make up a FOR ... NEXT loop with control variable *LOOP*. This loop cycles once for every letter of the password, calling the subroutine at line 200 each time. The result is a potential password stored in *PASSWORD$*

120 displays the putative password

130 Calls the subroutine at line 300. This checks whether or not you like the password. If you don't the program produces another until you're satisfied

140 If the flag variable *FINISH* is not equal to 1 then the GOTO sends the program back to pick another password. Notice that *FINISH* hasn't been previously assigned and so initially takes the value 0

150 Displays your final choice

160 The END stops the program crashing into the following subroutines

200 The start of the subroutine is labelled with a REM for clarity

210 This randomly slices off one letter from *SET$* and stores the result in *PICK$*

230 Adds this letter to *PASSWORD$*

240 RETURNs control to the statement after the GOSUB

300 Start of the keyboard routine

310-320 Asks if you like the password and mugtraps the results: if the reply isn't Y, y, N or n the GOTO ensures that the user is asked again

330 If the reply was Y or y the flag variable *FINISH* is set to 1. This means that the GOTO of line 140 will be ignored and the main loop will come to an end



HAVE you ever noticed how slow the Aten's power function is? If you haven't try typing PRINT 1^1^1^1^1^1^1 at the keyboard. Compare this with PRINT 1+1+1+1+1+1+1

The difference in speed is astounding and caused me to wonder if there is a better way to raise one number to the power of another

Not surprisingly there is In fact the built in function is so slow that it is possible to write a Basic routine which outperforms it

Program I illustrates this

```
20 POWER=1
30 IF P=0 THEN RETURN
40 P=P-1:POWER=POWER*X GOTO 30
```

Program I Simple power routine for small P

To compare this routine's performance with that of the built-in operator enter it together with our test bed listing Program IV Add the following line

10 GOTO 100

If you now run the program it will print out a table of timing information for the power routines The times are given in seconds and are times for 10 iterations

Note that the times for the built in function remain fairly constant regardless of the power to which the number is being raised while the times for the Basic subroutine increase as the power increases

When the power reaches 14 the built in operator begins to outperform the subroutine If you want to try the subroutine out or use it in your programs it is used as follows To raise *X* to the power *P* let X=number P=power GOSUB 20 X=POWER

The POWER be with you

Put your Atari's powar calculating capabilities into overdrive with FRANK O'DWYER's routines

where *X* is the number to be raised
P is the power to which it is to be raised
POWER is the answer returned by the subroutine at line 20

Note that *P* must be a positive integer — 0 1 2 3 4 5 and so on

It is possible to improve upon the performance of the simple routine in Program I by using a squaring technique as follows

To raise *X* to the power of 8 write $X = ((X^2)^2)^2$

To raise *X* to the power of 5 write $X = ((X^2)^2)X$

The routine given as Program II applies this technique and outperforms the built-in function for most medium powers *P*. Combine Program II along with Program IV and the line 10 shown above as before to obtain timing information

```
20 IF P=0 THEN POWER=1:RETURN
30 POWER=X:BIT=1
40 IF BIT+BIT>P THEN 60
50 BIT=BIT+BIT:POWER=POWER*POWER:GOTO
30
60 IF BIT=P THEN RETURN
70 BIT BIT*1:POWER=POWER*X :GOTO 60
```

Program II: Fast power routine for small to medium P

Note how the squaring technique leads to an improvement in performance for powers of 16 and 32. In fact performance will be best at powers of 0 1 2 4 8 16 32 64 and so on and will steadily deteriorate as powers increase

Note also that for some powers the built-in function outperforms the subroutine. This is not important since on average powers will be small and the subroutine will outperform the built in operator again on average

This routine is a good all-round performer and works equally well for small powers of *P*, as it does for medium powers up to about 24

A further improvement can be made to the squaring technique by applying it in recursive fashion. To compute X^{16}

Step 1 Compute X^8
Step 2 Compute X^4
Step 3 Compute X^2
Step 4 Compute product of above results and multiply by X

```
10 DIM STACK(32) GOTO 100
20 SP=0:IF P=0 THEN POWER 1.RETURN
30 POWER=X BIT 1
40 IF BIT+BIT>P THEN 60
50 BIT=BIT+BIT:POWER POWER*POWER*GOTO
40
60 P=P-BIT IF P>1 THEN STACK(SP)=POWER
:SP=SP+1 GOSUB 30.SP=SP-1:POWER=POWER*
STACK(SP):RETURN
70 IF P=1 THEN POWER=POWER*X:RETURN
80 RETURN
```

Program III: Recursive power routine for large P

Program III gives a subroutine to implement this technique using a stack to hold intermediate results. Notice that the routine calls itself in line 60. Amazingly this routine still outperforms the built-in operator despite its complexity and the overhead associated with the stack

However it does not really begin to outperform the squaring technique until powers of 32 and above are reached. This routine is therefore the best one to use if high values of *P* are anticipated. Again combine Program III with Program IV to obtain timing information

```
100 PRINT "POWER","TIME","GOSUB TIME"
:PRINT :FOR PP=10 TO 32 PRINT PP,
110 FOR T 10 TO 20 POKE T,0 NEXT T:REM
RESET TIMER
120 FOR 0=1 TO 10 X=1 01^PP NEXT 0:REM
10 ITERATIONS OF BASIC POWER
130 T=(PEEK(20)*PEEK(19)*256+PEEK(18))*
65536/50 PRINT T,
140 FOR T 10 TO 20:POKE T,0 NEXT T
150 FOR 0=1 TO 10 P=PP.X=1 01 GOSUB 20
:X=POWER NEXT 0 REM 10 ITERATIONS OF S
UBROUTINE POWER
160 T=(PEEK(20)*256*PEEK(19)+PEEK(18)*65536+PEE
K(0))/50 PRINT T
170 NEXT PP
180 END
```

Program IV: Comparison routine for power subroutines

A useful benefit of each of these subroutines is that apart from increased speed they also bring increased accuracy in comparison to the built-in operator

Try typing PRINT 2 2 at the keyboard. On some machines the answer given is 3.99999996 instead of 4. The subroutines I give do not suffer from this problem

Now can anyone come up with routines which work for negative values of power and fractional values for example X to the power of 2.2?

MIKE BIBBY continues his explanation of the fundamentals of the Atari's workings

Hexadecimallys you get two nyb out of every byt

AS we have mentioned in previous articles, the Atari – and all other machines based on the 6502 microprocessor – handles its binary numbers in groups of eight bits at a time. Such a group of eight is called a byte.

However while handling eight bits at a time is satisfactory from the machine's point of view from the human side of things it's rather difficult to manage. Those 1s and 0s are far too prone to error. Look at Table I for instance. It contains an error – can you find it?

It's all too easy to slip up when handling binary numbers – a single 1 in the wrong place and all is lost! To make things easier to deal with when I am copying out binary numbers I put a wavy line between bits 3 and 4 to split the byte into two equal groups of four.

For example if I were copying

% 10001111(= 1 4 3)

I would write

% 1000$1111

Actually splitting the byte into two groups of four bits is standard practice – each group of four bits is called a nybble – would you believe?

It's not too hard to see that the biggest number you can represent in a nybble is 15 and the smallest is 0,

%1111 and **% 0000**

respectively. After all you've only got four bits to play with!

So we can split up our byte into two nybbles of four bits each. Now when we split up a binary number in this manner we call the left-hand nybble the most significant nybble (MSN) and the right-hand nybble the least significant nybble (LSN).

We have already created one new number system – the binary system.

%10111011 = 187
%10101101 = 173
%10001111 = 151
%11110110 = 246

Table I

Let's design another one that combines the advantages of the denary system with those of the binary. That is it will be easy to read and write yet will still allow us to perceive the binary manner in which the machine handles things.

The system we want is called hexadecimal. This consists of using our standard digits 0 to 9 for the numbers zero to nine respectively and the letter A to F for the numbers 10 to 15. In this way it allows us to code the numbers available in a nybble (that is 0 to 15) with just one digit. This digit will be in the range 0 to 9 or A to F.

It may take a while to adjust to the idea of using letters of the alphabet for numbers but it soon becomes second nature. You just have to get used to counting


0,1,2,3,4,5,6,7,8,9,A,B,C,D,E,F

Remember there are 8 people in a cricket team, 0 in a rugby league team and F in a rugby union team. There are C months in a year and E days in a fortnight.

Now just as we prefix all our binary numbers with % we prefix our hexadecimal numbers with $ to avoid confusion. So $F means 15 while $9 means 9.

Studying Table II will really pay dividends – I suggest you practise writing down bit patterns of nybbles and their hexadecimal equivalents until it becomes second nature.

Given that we can encode a nybble in one hexadecimal digit and that a byte consists of two nybbles it should readily be apparent that we can encode a byte as two hexadecimal digits side by side, for example



That is

%10101001 = $A9 = 169

You just split the byte up into two


Decimal	Binary	Hexadecimal
0	0000	0
1	0001	1
2	0010	2
3	0011	3
4	0100	4
5	0101	5
6	0110	6
7	0111	7
8	1000	8
9	1001	9
10	1010	A
11	1011	B
12	1100	C
13	1101	D
14	1110	E
15	1111	F

Table II

y speaking, ybbles yte

nybbles – a left hand and a right hand nybble encode each as a hexadecimal number, then put the two side by side

You can go from hexadecimal to binary just as easily



That is

$8D = % 10001101 = 141

Although you have probably never thought of it in these terms you are well aware that the value a digit represents depends on the column it is in The number 230 is not as large as 320 though both numbers contain the same digits

In hexadecimal coding too the column a digit is in is important. For example..$10 is far greater than $01 In binary each column is worth twice the preceding one In denary.. our usual number system each column is worth 10 times the preceding one In hexedecimal each column is worth 16 times the preceding one

Believe it or not the columns in a four digit hexadecimal number from greatest to least are worth 4096 256 16 and 1 respectively

This means that

$ 1101 = 4096 + 256 + 1 = 4353

For the moment let s concentrate on the two digit that is two column hexadecimal number as these are all we need to store our bytes in In this case the left-hand column is the 'sixteens' column the right hand the units column

So

```
  16 1
$ 2 1 =  2*16+1 = 33
  16 1
$ 2 D =  2*16+13 = 45
  16 1
$ 8 0 =  8*16+0 = 128
  16 1
$ C 0 = 12*16+0 = 192
```

To translate a two digit hexadecimal number into denary simply multiply the number in the left-hand column by 16 and add it to the number in the right-hand column – remembering to translate A to F if necessary

The second column has the value 16 since the first column can only handle numbers up to 15 ($F) – the largest you can fit into a nybble (%1111) After 15 you *have* to use a second column for 16 that is $10

Just as in denary, we carry at 10 since the largest value our columns can handle is 9 so in hexadecimal we carry at 16 since the largest our columns can handle is 15 ($F)

It is the fact that we carry at 16 that gives this number system its name hexadecimal – here hex stands for 6 decimal for ten

Hexadecimal = 6 + 10 = 16

Given a second column $10, as we have seen is 16 17 will be $11 while $12 is 18 and so on until we reach 31 which is $1F

We have then run out of legal digits for the units column so if we want to go on to 32 we had better give ourselves another 16 and set the units column back to zero that is $20

Another way of looking at the second column is that it comes from the most significant nybble To turn the least significant nybble into the most significant nybble we have to shift it over to the left four times

If you cast your mind back to last month this is equivalent to multiplying it by two four times in succession that is 2x2x2x2=16 This is why a hexadecimal digit representing the most significant nybble is 16 times larger than the same digit representing the least significant nybble

The largest number you can store in a two-digit hexadecimal number is $FF = 15x16+15=255 This is of course the same as the largest number we could store in a binary byte – we often refer to a two digit hexadecimal number simply as a byte

To obtain the hexadecimal equivalent of a postive integer (whole number) less than 256 we divide it by 16 The quotient is the left hand digit the remainder the right hand translating into A to F where necessary

For example

174÷16=10 R 14

That is

$A R $E

Hence **174=$AE**


Anyway here s a program that will convert from denary to hexadecimal for you The workings shouldn t be too hard to follow

Once you ve understood it how about writing one that will convert from hexadecimal to denary?

● *That s all for now Next month we ll be looking at ways of combining binary numbers*

```
10 REM DENSOT TO HEX
20 DIM HEX$(16),ANSWER$(2)
30 HEX$ "0123456789ABCDEF"
40 PRINT "DENARY ( 0   255 )";
50 TOOUT NUMBER
60 IF NUMBER<>INT(NUMBER) OR NUMBER<0
OR NUMBER>255 THEN GOTO 40
70 HT=INT(DOUBLE/16)
80 LO=NUMBER-HT*16
90 ANSWER$=HEX$(HT+1)
100 ANSWER$(2)=HEX$(LO+1)
110 PRINT ANSWER$
120 PRINT
130 GOTO 40
```

Program 1

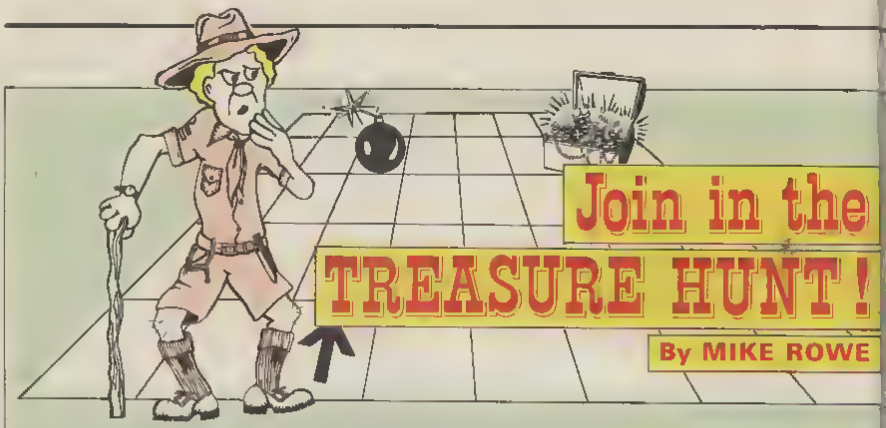

Join in the TREASURE HUNT!

By MIKE ROWE

THIS is a game of logic, the object of which is to find the treasure hidden in a matrix of squares in as few moves as possible.

The game is controlled by a joystick in port 1. This moves the man around the playfield searching for the treasure. A square can be interrogated by pressing the fire button and may contain one of five items:

1 – Nothing!
2 – An arrow
3 – A number
4 – A bomb
5 – The treasure!

An arrow indicates the direction of the treasure from your current position. A number shows the number of columns or rows away from your position.

If an X appears then the treasure is more than nine rows AND columns away from you.

If you find a bomb it will explode and move the treasure to a new position and all your previous clues will be invalid.

A square containing a ? will always contain an arrow clue. However it also has a high risk of containing a bomb so should be used carefully.

Each square always gives the same type of clue in any one game but may give two different answers on subsequent interrogation. This is because it may tell you that the treasure is for example two columns or four rows away – but you will not know which is which.

The answer displayed is random each time.

Each time a square is interrogated your score is increased by one until the treasure is found. The object is to score as low as possible and the lowest score is saved until the game is stopped.

Although seemingly complicated the game is actually very logical and easy to follow.

```
0 REM TREASURE HUNT
1 REM BY Mike Rowe 1985
5 DIM S$(18,20):HIGH=999
10 GRAPHICS 1+16:DL=PEEK(560)+PEEK(561
)*256:POKE DL+3,71
20 POSITION 8,0:? #6;" Treasure hun
t "
30 SETCOLOR 2,13,6:SETCOLOR 0,15,10:SE
TCOLOR 1,9,8:SETCOLOR 3,1,10
38 FOR I=1 TO 20:? #6;"                    "
:NEXT I:REM all ' in inverse
35 ? #6;" by  Mike  Rowe "
40 GOSUB 1000
50 GOSUB 2000
60 POSITION 0,22:? #6;"GUESSES ";SCORE;"          "
100 S=STICK(0):DX=0:DY=0:IF STRIG(0)=0
 THEN GOSUB 500
105 IF S=15 THEN 100
107 SOUND 0,200,8,10 FOR J=1 TO RND(0
):J=50:NEXT J:SOUND 0,0,0,0
110 IF S=6 OR S=10 OR S=14 THEN DY=1:
MAN=136
120 IF S=5 OR S=9 OR S=13 THEN DY=-1:MA
N=136
130 IF S<8 THEN DX=1:MAN=137
140 IF S>8 AND S<12 THEN DX=-1:MAN=139
150 DX=X+DX:IF X1=0 OR X1=19 THEN X1=X
160 Y1=Y+DY:IF Y1=0 OR Y1=21 THEN Y1=Y
170 POSITION X,Y:? #6;CHR$(OLD):LOCATE
 X1,Y1,OLD:POSITION X1,Y1:? #6;CHR$(MA
N)
180 X=X1:Y=Y1:GOTO 100
500 REM SEARCH SQUARE
505 SCORE=SCORE+1:POSITION 9,22:? #6;S
CORE
510 POSITION X,Y:GOTO 520+5*(X,Y)*10
520 ? #6;" "
529 GOTO 580
530 IF A$(TX-X1)=" " OR A$(TY-Y)=" " THEN
 ? #6;"X":GOTO 580
535 IF ASC(C)<5 THEN ? #6;A$(TX-X):
GOTO 580
539 ? #6;A$(TY-Y):GOTO 580
540 IF ASC(C)=5 AND TY<>Y THEN 545
541 IF TX=X THEN 545
542 IF ZX<X THEN ? #6;CHR$(133)
543 IF TX>X THEN ? #6;CHR$(134)
544 GOTO 580

545 IF TY<Y THEN ? #6;CHR$(131)
546 IF TY>Y THEN ? #6;CHR$(132)
549 GOTO 580
550 IF ASC(C)>2 THEN 540
555 GOTO 600
560 ? #6;"+"
565 GOTO 600
570 GOTO 600
600 FOR I=255 TO 50 STEP -5:SOUND 0,I,
10,10:NEXT I:SOUND 0,0,0,0
605 RETURN
608 REM DONE
610 POSITION X,Y:? #6;CHR$(160)
620 POSITION 0,22:? #6;"GOOD GUESS TRE
ASURE"
630 GOSUB 3000
640 POSITION X,Y:? #6;CHR$(162)
650 GOSUB 3000
660 POSITION X,Y:? #6;CHR$(162)
670 GOSUB 3000
680 POSITION X,Y:? #6;" "
690 IF STICK(0)=15 THEN 690
695 S(20,TY)=0:POSITION 0,22:? #6;"
                "
698 TX=INT(RND(0)*18+1):TY=INT(RND(0)*
20+1):IF S(TX,TY)=5 THEN 696
697 S(TX,TY)=4
699 RETURN
900 REM TREASURE FOUND
910 POSITION 0,21:? #6;"treasure found
 "|? #6 ? #6,"previous best ";HIGH
920 IF SCORE(HIGH THEN HIGH=SCORE
930 RESTORE 900
940 READ A,B,J:IF A=-1 THEN 990
```

VARIABLES

S(n,n)	Matrix of treasure map	**DX,DY**	Amount of movement
DL	Start of display list	**TX,TY**	Position of treasure
S	Joystick position	**CHSET**	Location of start of internal character set
X,Y	Old position of man	**RAMTOP**	Top of memory
X1,Y1	New position of man	**CH**	Location of new character set

PROGRAM MAP

10	Sets up graphics. Change Line 1 to Graphics 2	**550**	? square
26	Sets colours	**560**	Treasure!
100–190	Main movement routine	**600–660**	Bomb routine
100–140	Read stick and trigger	**696**	New position for treasure
107	Sound of man moving	**800–906**	Treasure found routine
150–160	Calculate new position	**830–850**	Music playing routine
170	Saves contents of square and moves man	**900–906**	Music data
190	And again!	**1000–2100**	Initialise
500–585	If button pressed search square	**1010**	Calculates new memory location for redefined characters
505	Increment attempts	**1020**	Reads redefined characters
510	Go to relevent line depending on type of square	**1030**	Moves part of old character set to RAM
520	Empty square	**1100–1160**	Character data
530	Number square	**2010**	Prevents screen colour from cycling
540	Arrow square	**2020–2070**	Random calculation of position of each type of square
		3000	Explosion sound routine

```
000 SOUND 0,0,10,10:SOUND 1,0,10,0:FOR
 I=1 TO 200:NEXT I:SOUND 0,0,0,0:SOUN
D 1,0,0,0:GOTO 648
006 IF STRIG(0)=1 THEN 966
070 GOTO 10
100 GOTO 121,195,2,68,102,4,88,144,6,8
0,171,2,78,111,4,81,121,4,91,102,4,91,
186,6,91,0,7,102,0,1,91,144,4
981 POKE 121,144,4,102,144,2,91,144,4,
91,144,14,0,204,2,95,102,2
982 DATA 68,102,4,68,144,4,88,121,2,78
,121,4,81,121,4,95,102,4,91,144,6,91,8
,3,102,8,1,91,144,8
983 DATA 121,144,4,102,144,2,91,140,4,
91,144,14,0,204,2,91,102,2
984 DATA 68,241,8,68,136,4,88,90,4,68,
96,4,0,138,2,68,136,4,78,153,2,88,100,
2,76,100,4,121,0,2
985 DATA 88,138,7,88,135,1,88,163,4,68
,153,2,78,157,4,95,144,10
900 DATA -1,-1,-1
1000 REM CHOOOOCTEX SET
1010 CHSET=57344 :RAMTOP=PEEK(106):CH=R
AMTOP-8:CHBASE=CH*256:POKE 756,CH
1015 IF PEEK(CHBASE+40)=255 THEN RETURN

1020 RESTORE 1100:FOR I=CHBASE+8 TO CH
BASE+119:READ A:POKE I,A:NEXT I
1030 FOR X=120 TO 471:POKE CHBASE+I,PE
EK(CHSET+I):NEXT I
1050 RETURN
1100 DATA 255,129,129,129,129,129,129,
255,0,102,102,102,0,0,0,0,24,60,126,
24,24,24,0
1110 DATA 0,24,24,24,126,60,24,0,0,16,
60,126,126,60,16,0,0,0,12,126,126,12,0
,0
1120 DATA 255,195,217,243,231,255,231,
255,24,24,0,24,50,60,0,24,24,24,16,24,
20,28,16,24
1130 DATA 24,24,0,60,50,24,24,60,0,31,
62,65,255,168,173,250,4,0,16,24,60,126
,126,60
2140 DATA 0,170,84,40,84,40,84,100,0,4
0,60,136,0,170,60,40
2000 REM INITIALISE VALUES
2010 POKE 77,0
2020 FOR I=1 TO 10:FOR J=1 TO 20:S(I,J
)=0 NEXT J:NEXT I
2030 FOR J=1 TO 70:K=INT(RND(0)*18*15)
Y=INT(RND(0)*20+1):S(K,Y)=5 NEXT I
2035 FOR I=1 TO 10:K=INT(RND(0)*20+1):
Y=INT(RND(0)*20+15):S(K,Y)=6 NEXT I
2040 FOR I=1 TO 50:K=INT(RND(0)*18+1):
Y=INT(RND(0)*20+1):S(K,Y)=2 NEXT I
2050 FOR I=1 TO 20:K=INT(RND(0)*18+1):
Y=INT(RND(0)*20+1):S(K,Y)=3:POSITION 0
,Y:? 00;CHR$(59+1*20):NEXT I
2060 K=INT(RND(0)*18+1):Y=INT(RND(0)*2
0+1):S(K,Y)=4 POSITION K,Y:? 00;CHR$(I
+128);TX=K:TY=Y
2070 K=1:Y=1.LOCATE K,Y,OLD:POSITION K
,Y:? 00;CHR$(42+5*2
2080 SCORE 0
2100 RETURN
3000 FOR I=0 TO 255 STEP 5:SETCOLOR 3,
I/16,11 SOUND 0,I,8,10 NEXT I:50000 0,
0,0,0:SETCOLOR 3,I,10 RETURN
```

Tired of typing?
Take advantage of our finger-saving offer on Page 61

The great adventure has begun...

WHEN we launched MicroLink we naturally expected it to generate quite a large degree of interest among micro enthusiasts. What we didn't expect was what actually happened – a stampede of applications to join.

They poured in from all parts of Britain and even more surprisingly from places as far away as Tasmania.

What has attracted them to MicroLink?

For the computer buff it's the thought of joining one big family of like-minded enthusiasts. Through the Chat facility he can talk in real time to people who are using the same micro as himself, discussing common problems and sharing hints and tips.

And as MicroLink is part of Telecom Gold and Dialcom – the largest electronic mail service in the world – he can also communicate speedily and cheaply with other enthusiasts in many other countries.

For the businessman, MicroLink immediately provides an office tool that he might not have been able to afford before. At his fingertips are the same facilities that are enjoyed by every leading British business – all of whom are subscribers to Telecom Gold.

For a once-only payment of £10 he can turn his micro into a telex machine – which normally would cost him £2 000. He can send a telex message for as little as 5.5p and even that is reduced by 10 per cent if he defers transmission until after 8pm!

His micro can also become a terminal to the Telecom Gold computer able to tap its tremendous power and versatility and to use giant number-crunching programs that can only be run on a mainframe.

No longer need he be tied to his office. He can use his micro from home – or golf club. And if he's not too confident about his spelling he can run his letter or telex message through the sophisticated Spell program before sending it off.

One of the many advantages of an online service like MicroLink is its flexibility – its ability to cope quickly with changing needs.

Although it is only a few weeks old new sections are being continually introduced to provide users with an even more comprehensive service. Among the latest are a definitive guide to all UK bulletin boards which can be updated daily as new boards open up or phone numbers or hours of access change.

And there's a review of the computer magazines so you can see what subjects are being covered in their current issues.

Finally, why should the Tasmanians of all people want to join MicroLink? As they live right on the other side of the world won't it cost a fortune to communicate with the UK?

Not so. Because Tasmania is part of the international PSS network. Instead of paying the normal telephone call rate of 96p a minute they can call MicroLink over PSS for just 10p a minute.

For callers in Europe it's even cheaper – just 2.2p a minute. With incentives like this we expect MicroLink to grow into a truly international service.



WOOTTON COMPUTERS

	Our Price
520ST STfm Computer	£598.99 P.O.A.
520ST STfm Computer + 3.5" Disc Drive 500k	£698.99 P.O.A.
130 XE 128k Computer	£168.95 168.95
800XL 64 Computer	£129.95 £79.95
1010 Program Recorder	£34.99 £32.00
1050 Disc Drive + DOS 3	£199.99 £175.00
800XL + 1010 cass + Invit. Prog. + Pole Position + 5 blank cassettes	£129.00
800XL + 1050 Disc Drive + Home Filing Manager + Pay Off Adventure + Game Master Disc (6 pk)	£349.95 240.00
M.C.S. PERIPHERALS	
Monoscreen Tatty MT 80 + (400/800)	£249.99 £219.95
CX77 Touch Tablet + Atari Art Soft	£49.99 £40.00
M.P.S. SOFTWARE	
Asteroids	£9.95 £8.45
Chase	£9.95 £8.45
Invasion	£9.95 £8.45
Lone Raider	£9.95 £8.45
Pengo	£9.95 £9.45
Pole Position	£9.95 £8.45
QIX	£9.95 £8.45
Space Invaders	£9.95 £8.45
Donkey Kong Jnr	£14.95 £13.00
Bounty Bob Strikes Back	49.95 47.95
All Asterisk software available at discount prices. Please phone for full details of stocks.	
EDUCATION/PROGRAMMING	
Assembler Ed+	£22.95 £20.50
Conversations: Family Spanish	£22.95 £20.50
Conversa vons: German/Italian	£22.95 £20.50
Maths 'O' Level Course Year 1-4 (cass) £9.95 (disc) £12.95	
Maths O Level Course Year 5 Revision (cass) £9.95 (disc) £12.95	
Intro Programming 1 (cass)	£10.99 £9.45
Logo + Manuals	£99.95 £85.00
Microsoft Basic (cart)	£44.95 £39.95
Touch Typing (cass)	£10.95 £11.99
HOME/BUSINESS	
Atari Writer (cart)	£39.95 £37.00
Home Filing Manager (disc)	£24.95 £14.00
Kingdom (cass)	£8.99 £8.00
C.D.C. Bravo (65/70/110 in box	£19.00
Microsoft Olivia (55/70/110 in box	£19.00
Compute Disc 10 in Library Case	£19.00
Blank Cassettes 10 of C20	£5.00
Diskette Hoffy 10 disks	10.95
"Wood" Style 5¼ in. corner for 10 disks	10.00
5¼ Disc-a	7.95 7.00
Trak Ball	£19.95 £17.95

If you disc costs use the Bulk Disc Notcher £5.00

All Software is sent by 1st class mail. P&P is included in prices quoted


118 EDLESTON ROAD, CREWE, CHESHIRE 0270-214118

ATARI USER invites you to join . . .

MicroLink

in association with

TELECOM GOLD*

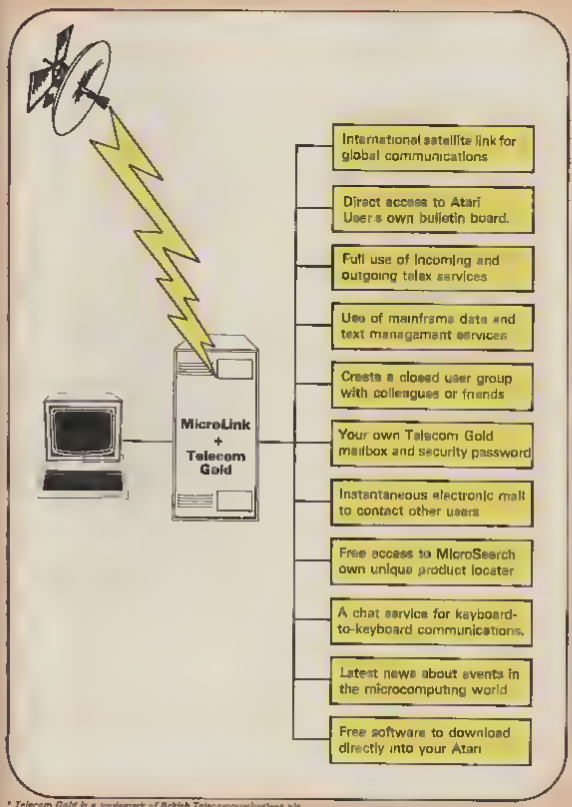

MicroLink is this year's most exciting – as well as most ambitious – development in the rapidly-expanding world of telecomputing.

For the first time, it combines the enthusiasm of many thousands of computer users with the power and versatility of Britain's national database, Telecom Gold.

The result is an international communications link that is your passport to new realms waiting to be explored, new experiences to be shared with kindred spirits who enjoy telecomputing just as much as you do yourself.

Communicating the MicroLink way is ultra-fast – and much cheaper than you might expect. Wherever you live, you get direct access to the Telecom Gold computer at local call rates.

With your own electronic mailbox you can send a message to one destination – or to 500! – for less than you would pay for a first class stamp.

You can send and receive telex messages worldwide, or have a two-way chat with other users in real time.

And the cost of using MicroLink? Just £3 a month. Plus small additional access charges as detailed overleaf.

Join MicroLink now – and let you and your Atari be in the forefront of the new revolution in communications!

* Telecom Gold is a trademark of British Telecommunications plc

These are some of the innovative features you'll be able to use when you join . . .

MicroLink

What facilities you can use – directly from your micro:

- Access at any hour of the day or night to Microsearch, our exclusive product locater, which is constantly updated by Britain's major distributors. Powerful, easy-to-use keyword searching means you should find what you want within seconds.
- Direct contact, via electronic mail, with other users throughout the world. And because you're connected via PSS, and not the normal phone links, it's usually much, much cheaper.
- Full use of the closed user group bulletin board – with a special section for Atari users.
- Full service of news about new products and events. All presented in easy to read form to keep you right up to date with what is happening in the world of microcomputing and communications.
- Send and receive mailbox messages of any length with other Telecom Gold mailbox users, the number of which is rapidly growing.
- Send and receive telex messages both within Britain and all over the world.
- Send telemessages to any address in the UK. If sent before 10pm they will get guaranteed delivery the next working day, including Saturday. *(This service commences shortly.)*
- If you live outside the 01 local call area, use of PSS at local phone call charges, including access to the international Dialcom system. *(This covers nearly 90 per cent of the population of the UK.)*
- Use, should you require it, of the Telecom Gold mainframe for storage of your own data.
- Encouragement to combine with friends or colleagues to set up your own closed user group within MicroLink.
- Provision of free telesoftware, which you can download into your Atari.

What you will receive when you join MicroLink:

- Free registration on Telecom Gold – and your own private mailbox.
- Free password, which you can change at any time you like. This gives you a high level of security in order to preserve confidentiality, and is known only to you.
- Free instructional manual to introduce you to Telecom Gold and its many services.
- Free Help facility should you require additional assistance.
- Free newsletter to keep you informed of future developments in this ever expanding service.

What you need to access MicroLink:

- Any personal computer, portable computer, hand held device or electronic typewriter with communications facilities.
- Appropriate communications software.
- Modem (you can use 300/300, 1200/75 or 1200/1200 baud as you wish).

What will it cost?

- Monthly standing charge of £3 (compared to Telecom Gold's normal £10 a month minimum charge).
- Connect charges. 3.5p a minute (cheap rate), 10.5p a minute (standard rate). Plus 2p a minute PSS charge if calling from outside the 01 call area.
- Once-only telex registration fee (if required). £10.
- Outgoing telex: 5.5p per 100 characters (UK), 11p (Europe) and 16.5p (USA).
- Incoming telex: 50p.
- International mail: 30p for first 2,048 characters, then 15p for each additional 1,024 characters.
- Telemessages: £1.25 for a maximum of 350 words or 35 single spaced lines.
- On-line databases on Telecom Gold: charges as indicated at time of log on.

To secure your immediate registration, complete the form opposite and return it to: MicroLink, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

Name

Position

Company

Address

Postcode Daytime telephone

Commencement of Service
Please indicate month of commencement □□ 19 □□
Please allow 10 days for validation of mailbox

Payment
Whilst Database Publications Ltd is the supplier of all the services to you the commission and billing thereof will be handled by Telecom Gold as agents for Database Publications Ltd.
Date of first payment to be on 15th of month following commencement.
Please complete billing authorisation form A, B or C below

A. Direct Debiting Mandate *(Enter full postal address of Bank Branch)*
To

I/We authorise you until further notice in writing to charge to my/our account with you on or immediately after 15th day of each month unspecified amounts which may be debited thereto at the instance of British Telecommunications plc – TELECOM GOLD by Direct Debit.

Name of Account to be debited

Account Number

B Please debit my/our Access/Visa/American Express account number

I/We authorise you until further notice in writing to charge to my/our account with you on or immediately after 15th day of each month unspecified amounts which may be debited thereto at the instance of British Telecommunications plc TELECOM GOLD

C Please invoice the company/authority
(✓) □ If you select this option which is ONLY AVAILABLE to government establishments and public limited companies, you will be sent an authorisation form for completion which will require an official order number to accept unspecified amounts.

MicroLink
in association with
TELECOM GOLD*
Application Form

Terms and conditions: I/We have read and accepted the terms and conditions as set out on this document and hereby apply to join MicroLink.

(✓) □ I wish to use Telex. I authorise you to charge an additional £10 to my initial bill.
□ I confirm that I am over 18 years of age

Signature

Date

(✓) □ I enclose my cheque for £5 payable to Database Publications as registration fee to MicroLink.

I intend to use the following computer

SEND TO:
MicroLink
Database Publications
Europa House
68 Chester Road
Hazel Grove
Stockport SK7 5NY

FOR OFFICE USE ONLY
Mailbox assigned
Start date
Password

* *Telecom Gold is a trademark of British Telecommunications plc*

AT7

How much it costs to use MicroLink

Initial registration fee: £5

Standing charge: £3 per calendar month or part.

Connect charge: 3 5p per minute or part – cheap rate, 10 5p per minute or part – standard rate
Applicable for duration of connection to the Service. Minimum charge 1 minute
Cheap rate is from 7pm to 8am, Monday to Friday, all day Saturday and Sunday and public holidays. Standard rate is from 8am to 7pm, Monday to Friday excluding public holidays

Filing charge: 20p per unit of 2 048 characters a month
Applicable for storage of information such a telex, short codes and mail files. The number of units used is an average calculated by reference to a daily sample.

Information databases: Various
Any charges are shown to you before you obtain access to the database

MicroLink PSS service: 2p per minute or part (300 baud), 2 5p per minute or part (1200 baud)
Only applies to users outside the 01 London call area

MicroSearch, news service, bulletin board and similar sections of MicroLink: No charge.

Telex registration: £10

Outgoing telex: 5 5p per 100 characters (UK), 11p per 100 (Europe), 16 5p per 100 (N America), £1 15 per 40 (Rest of world), £2 75 per 40 (Ships at sea)
Deferred messages sent on the night service are subject to a 10 per cent discount.

Incoming telex: 50p for each correctly addressed telex delivered to your mailbox. Obtaining a mailbox reference from the sender incurs a further charge of 50p

It is not possible to deliver a telex without a mailbox reference. If a telex is received without a mailbox reference the sender will be advised of non delivery and asked to provide a mailbox address
Each user validated for telex and using the facility will incur a charge of 6 storage units a month. Further storage charges could be incurred depending on the amount of telex storage and the use made of short code and message file facilities.

Telemessages: £1.25 for up to 350 words

Radiopaging: No charge
If you have a BT Radiopager you can be paged automatically whenever a message is waiting in your mailbox.

International Mail: For the first 2,048 characters – 20p to Germany and Denmark, 30p to USA, Australia, Canada, Singapore, Hong Kong and Israel For additional 1,024 characters – 10p, 15p

These charges relate to the transmission of information by the Dialcom service to other Dialcom services outside the UK and the Isle of Man. Multiple copies to addresses on the same system host incur only one transmission charge

Billing and Payment: All charges quoted are exclusive of VAT Currently all bills are rendered monthly

On receipt of this application form you will be sent:
- Your personal mailbox number and initial password
- A Quick Guide to Mail manual
- Customer Helpline telephone number

This contract is made between Database Publications Ltd of Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY (DPL) and the subscriber whose name and address appears overleaf

Whereas DPL has entered into British Telecommunications plc (BT) through its agent Telecom Gold Limited to sell and distribute the MicroLink Service (the Service) and BT through Telecom Gold Limited has agreed to supply the Service to customers of DPL.

It is agreed as follows

1 Access
DPL shall allocate to the subscriber such user codes (called mailbox numbers) as it thinks fit in order to allow the Subscriber and persons associated with the subscriber access to use the Service.

2 The Service
The Service shall be BT's Telecom Gold Dialcom Service, and shall comprise such services and facilities as DPL shall in its discretion from time to time consider appropriate subject to the supply by BT of such services and facilities

3 Charges
a) The subscriber shall pay for all charges arising under this contract from his subscription to and/or use of the Service and/or from the issue to him of any mailbox number issued by DPL to the Subscriber All charges are payable on demand.
b) DPL shall give to the Subscriber not less than fourteen days written notice of any alteration in the applicable charges for the Service. The charges applicable at the date of this Subscription are set out overleaf
c) Subject to any provision of this contract, liability for charges for service shall commence, unless BT notifies the customer to the contrary with effect from the first day of the month in which BT first makes service available to the customer

4 Limitations on use
a) The Subscriber shall not use or permit any person to use the Service otherwise than according to instructions given by DPL or BT existing for the time being and in particular shall not use the Service for the purpose of sending abusive offensive indecent or menacing communications, or for sending communications which cause annoyance, inconvenience or needless anxiety
b) The Subscriber shall not permit any person to use the Service by means of a mailbox number issued by DPL unless the name and relationship of that person to the Subscriber has been disclosed to DPL.

5 Termination
a) This contract may be terminated by either party giving not less than one month's written notice such notice to expire on the last day of any calendar month
b) DPL may terminate this contract forthwith without notice if the Subscriber shall
i) fail to pay any sum payable under this contract or payable under any other contract with DPL to which the Subscriber is a party
ii) be adjudicated bankrupt, enter into liquidation or any arrangement or composition with his creditors or if a receiver is appointed of any part of the Subscriber's assets and not discharged within seven days or if any judgment against the Subscriber remains unsatisfied for more than seven days
iii) fail to comply with any term of this contract, or any instruction given by DPL or BT under clause 4 of this contract
c) DPC may terminate this contract without notice in the event that BT and/or its agent Telecom Gold shall cease to supply the Service.
d) If the customer fails to comply with any provision of this contract he shall nevertheless continue to be liable for all charges due and to become due for service provided during any period of such failure

6 Assignment
The subscriber shall not, without the written consent of DPL assign this contract or any rights or obligations arising under this contract.

7 Limitation of liability
a) For the avoidance of doubt neither DPL nor BT has an obligation duty or liability in contract, tort, for breach of statutory duty or otherwise beyond that of a duty to exercise reasonable skill and care.
b) In any event in no circumstances shall either DPL or BT be liable in contract, tort (including negligence or breach of statutory duty) or otherwise for loss (whether direct or indirect) of profits business or anticipated savings or for any indirect consequential loss whatever
c) In any event DPL's liability in contract tort (including negligence or breach of statutory duty) or otherwise arising by reason of or in connection with this contract or howsoever otherwise shall be limited to £500 000 for any one incident or series of incidents and £1m for any series of incidents related or unrelated in any period of 12 months
d) DPL does not exclude or restrict its liability for death or personal injury where such arises as a result of the negligence of DPL or its employees.
e) The subscriber shall indemnify DPL against all loss actions proceedings costs claims and damages arising from
i) any breach by the Subscriber of his obligations hereunder
ii) the use of the Service by third parties by means of any mailbox number issued to the Subscriber
f) DPL shall not be liable for any loss or damage occurring through any act or ommission of BT or its agent Telecom Gold Limited in the supply or failure to supply the Service to DPL Notwithstanding anything to the contrary contained hereby the supply of the Dialcom service shall be upon and subject to the standard terms and conditions of BT from time to time and of which the subscriber shall be deemed to be aware
g) Neither party shall be liable for failure to perform its obligations if the failure results from Act of God Act of Government or other Authority or Statutory undertaking, fire explosion accident, power failure industrial dispute (valid) by to obtain materials or anything beyond such party's reasonable control.
h) DPL accept liability hereunder for direct loss caused to the subscriber where such loss arises solely due to acts or omissions of DPL or its employees in the provision of access to the service up to an aggregate maximum of £1 000 or a sum equal to one month's average service charges to the subscriber over the previous 12 months period, whichever is smaller Save as otherwise provided herein DPL shall be under no liability for any loss suffered by the subscriber or by any other person arising from negligence or otherwise

8 Any notice consent or other communication required to be given hereunder by either party to the other shall be made in writing and may be served by first class post to the address of the other as set out herein, and shall be deemed to have been received 48 hours from the time of posting.

9 This agreement constitutes the entire agreement between the Subscriber and DPL in respect of the Service and no representation, statement, warranty, or condition not expressly contained in the agreement or incorporated herein by reference shall be binding upon DPL as a warranty or otherwise

10 The agreement shall be governed and construed in accordance with the laws of England, and the English Courts shall have exclusive jurisdiction to determine any disputes arising hereunder

A money-saving special offer from ATARI USER



THIS is your passport into the exciting world of telecomputing!

Price includes VAT post & packing

IT'S by far the fastest growing field in micro computing All over the world micros are talking to each other over the telephone line As well as to the ever increasing number of public and private databases, bulletin boards – and even giant mainframe computers

We want all *Atari User* readers to share in the new technology that makes all this possible So we're offering a unique starter pack at an unbeatable price It gives you everything you need to get in touch with the big wide world outside

- **Modem**
- **Software**
- **Serial Interface**

The modem is the amazing Miracle Technology WS2000 One of the most powerful on the market, it provides all the facilities you require Yet it's simplicity itself to use Just plug it into a standard British Telecom jack and you're away!

The package also features the superb Datari serial interface, which links the modem directly to the Atari's peripheral port without the need for the 850 serial interface

The best hardware deserves the best software to drive it, and with the specially written Multi-Viewterm program the package is complete It supports all the standard baud rates – 1200/75, 75/1200, 1200/1200 and 300/300 full duplex.

Your *Atari User* package will allow you to talk directly to other computers, to send your own telex messages, to go tele shopping – even to download free software programs directly into your Atari

You will be able to join Micronet/Prestel, which will immediately open up to you a vast menu of 750,000 pages of information – instant world news, sports, holidays, hotels, train and airline timetables, all regularly updated

And you can become one of a growing number of enthusiasts who are joining MicroLink, the giant database set up in conjunction with Telecom Gold, which is described more fully in this issue

But first, send for the Miracle package – and enter the fascinating, limitless world of communications!

Use the order form on Page 61



Go Space-hopping with your Atari – plus a little help from TeleLink

TeleLink, Britain's pioneering communications magazine, is full of helpful advice about all the fascinating things you can do when you link your Atari to your telephone

In the latest issue now on sale, are special features on

- *How to cut down your phone bill. Taking the mystery out of the phone charging system*
- *Start of a guided tour of the massive American database Knowledge Index*
- *Telecom Gold. What it is what it does and how much it can cost.*
- *Round up of all the latest advances in the development of databases for schools*
- *Facts and phone numbers of all the latest UK bulletin boards*
- *Why PSS is the most economical way of accessing systems all over the world*
- *Communicating with a portable a detailed survey of all the latest lap held micros*
- *Guide to the latest telesoftware you can download from Prestel*
- *Pages of up to the minute news of happenings in the teletext and viewdata industries*
- *Setting up a viewdata system a first hand report of how it's done*
- *Communications in the City a look at what can happen when financiers go on line*

ORDER FORM

Subscription for 12 issues

UK £12	☐	5001
EIRE £13 (IR £16)	☐	5002
Overseas (surface) £20	☐	5003
Overseas (Airmail) £40	☐	5004

Payment please and rate method (✓)

☐ Access/Mastercard/Eurocard/Barclaycard/Visa

No. _____

☐ Cheque/PO made payable to Database Publications Ltd

Name _____ Signed _____

Address _____

_____

Send to *TeleLink*, FREEPOST Europa House 68 Chester Road Hazel Grove Stockport SK7 5NY


No stamp needed (posted in UK) *Please allow 28 days for delivery*

YOU CAN ALSO ORDER BY PHONE. 061-480 0171 (24 hours)

Don't forget to quote your credit card number and full address

AT7

TeleLink deliberately steers away from technicalities to present the facts in vivid detail – to help you play YOUR individual part in the communications revolution that is going to change all our lives



HELP NEEDED ON HELP KEY CODE

IN the first issue of Atari User you explained how to disable the Break key in a Basic program

Is it possible to disable the Reset key in the same way so that a Basic program cannot be listed?

Next, if you PEEK(53279) you can use the Select Option and Start keys I know the codes for those three but is there one for the Help key?

Finally, I am writing a Basic program using the NOTE and POINT commands

I know that it is possible to take one byte off a disc file and look at it

Is it possible to then change the information in that byte and replace it in the same place in the same file without changing any of the other bytes in that file? If so how?— **A K Bishop, Cheshunt, Herts**

■ Location 732 ($2DC) is updated each time the Help key is pressed The values obtained are as follows

17 = HELP only
81 = <Shift> HELP
145 = <Ctrl> HELP

The operating system will not clear the value for you so it will remain in location 732 until you POKE it to zero or the Help key is pressed in a different combination

To change single bytes within a disc file you must first open the file for update with

```
10 OPEN #1,12,0,"D:
   Filename.Ext"
```

This will set up the file ready to read the first byte of data You may now PUT or GET bytes as you wish If you PUT bytes they will overwrite the existing data

So if you want to read a byte then change it NOTE the file position first then GET the byte

If it is a byte you wish to change POINT yourself back again and PUT your new data For example the program above will change all bytes in a file with a value of 1 to a value of 2

This method will work with DOS 2 or 3 as it uses absolute rather than relative addressing

Don't try to exceed the end of the file using this method as Append mode is the only way to do this

For an answer to your question on Reset protection see next month's issue where there will be an article on protecting your Basic programs from prying eyes

★ ★ ★

FOR the use of readers like me who prefer joysticks to keyboard control I have changed these program lines in Attack Squash in the first issue of Atari User to

```
1010 S=STICK(0)
1050 IF S=7 AND X<16
     THEN GOTO 1200
1950 IF S=11 AND X>1
     THEN GOTO 1150
```

Once you have changed these lines you will find that you will be able to use a joystick I also have a question

Is it possible to disable the Reset button if so is there a program or a POKE command for the XL series? I would be very grateful if you could help me — **Tim Keats, Bracknell, Berks**

■ Yes the Reset key can be disabled See the reply to Mr Bishop above

Squash swap

HAVING typed the Attack Squash listing from Atari User into my 800XL I suddenly realised that there is very little that bores me more than a good game of squash so I set about converting this program to something more interesting

The listing below if added to the Attack Squash listing will produce a Breakout type game that I feel is perhaps a wee bit more interesting

As in the Squash program every time a ball is hit the bat moves up one line

Each brick of the breakout wall must be hit twice to demolish it First hit scores one point and the second hit scores a further two points

There are no points awarded for hitting the ball with the bat which means there is a maximum score of 324

After the brick is hit for the first time it changes from a hollow rectangle to a solid rectangle and after the second time a brick has been hit it disappears

The bat controls are just the

Keep your guitar in tune

I AM writing to say how pleased I am with your new magazine it really is nice to see Atari coming back on top where it deserves

I enclose a little program which I find quite useful when I check the pitch of my guitar from time to time and also when I re string it

I am sure many readers own a guitar but perhaps do not own a tuner or pipe This little routine does help to keep you in concert pitch

The notes are correct on my 800XL and old 400 I don't know if all Ataris are the same if not a slight adjustment to the data line should correct things

Keep up the good work — **Bruce Burke, Canterbury, Kent**

```
10 REM Guitar Tuning Aid
20 REM by Bruce Burke
30 GRAPHICS 0
40 OPEN #2,4,0,"K"
50 POKE 87 :POKE 82,0 : REM GUITAR TUNING AID"
60 PRINT :PRINT "Press any key for E,A,D,G,B,E"
70 FOR G=1 TO 6
80 REM A
90 GET #1,DUMMY
100 SOUND 2,0,10,8
110 PRINT :POINT "String No ";G
120 NEXT G
130 GET #1,DUMMY
140 CLOSE #1
150 RUN
160 DATA 47,00,30,107,143,191
```

same as in the Squash program – the left/right arrow keys move the bat left and right respectively

The most interesting aspect of this listing from a programming point of view is probably the use of the LOCATE command to see if the ball is over a blank square a hollow rectangle or a solid rectangle returning a value in Z that is used to determine the score increment

Line 655 turns a hollow rectangle into a solid rectangle and lines 561 to 565 draw the bricks that make up the breakout wall

Lines 1671 to 1678 define the hollow rectangle brick shape and lines 3000 to 3070 increment the score as required and produce the new sound effects

Line 230 stops the bat going higher than the breakout wall as it moves up the play area

Lines 270 and 310 reposition the ball counter and score as now it looks prettier that way

Line 700 stops the ball leaving the play area and line 740 finds out what the ball is laying over – Z=36 if ball lays over a hollow brick and Z=36 if ball lays over a solid brick

Line 743 sends the program to work out the score if a brick has been hit and line 746 stops B going out of range

Line 746 is just line 740 of the Squash program, but it was necessary to move it

I hope you like this little addition to the Attack Squash program

```
230 B=7
270 POSITION 0,21
310 POSITION 9,21
561 FOR I=1 TO 6
562 FOR N=1 TO 10
563 POSITION N,I:PRINT #6;"R"
564 NEXT N
565 NEXT I
655 IF Z=10 THEN PRINT #6;"$":GOTO 670
700 IF B=2 THEN M=-M*GOSUB 2000
740 LOCATE A,B,Z
743 IF Z=36 OR Z=30 THEN GOSUB 3000
746 IF B=1 THEN M=ABS(M)
760 POSITION A,B
820 REM DELETE THIS LINE FROM SQUASH
1671 POKE CH+(ASC("R")-32)*8+0,255
1672 POKE CH+(ASC("R")-32)*8+1,255
1673 POKE CH+(ASC("R")-32)*8+2,195
1674 POKE CH+(ASC("R")-32)*8+3,195
1675 POKE CH+(ASC("R")-32)*8+4,195
1676 POKE CH+(ASC("R")-32)*8+5,195
1677 POKE CH+(ASC("R")-32)*8+6,255
1678 POKE CH+(ASC("R")-32)*8+7,255
3000 M=-M
3010 IF Z=36 THEN NT=NT+5:P=210
3020 IF Z=30 THEN NT=NT+1:P=200
3030 FOR G=1 TO 5
3040 SOUND 0,P,14,8
3050 NEXT G
3060 SOUND 0,0,0,0
3070 RETURN
```

ATARI USER Mailbag

WE welcome letters from readers – about your experiences using the Atari micros about tips you would like to pass on to other users and about what you would like to see in future issues

The address to write to is

Mailbag Editor
Atari User
Europa House
68 Chester Road
Hazel Grove
Stockport SK7 5NY

Self-test problem

COULD you please tell me if it is possible to turn off the self test program on my 600XL.

I bought an Atari game called Zexxon stated to be for any 16k Atari machine but the tape aborted just as loading was finished

I changed it only to find it happening again I asked the machine for the available free RAM which was 13315

So my conclusion is that the game being 16k and my machine being 13313 the memory wiped itself to stop overloading

If the self test program cannot be turned off will I be able to run this tape with the aid of an expansion module?

I know the simple answer is to get a better machine but I would like to know without the added expense – **C Thomas, Brighouse, West Yorks**

● With the tape in the recorder try holding down the Start and Option keys when you turn the machine on When you hear the buzz press Play on the recorder and then press Return

The lost chord . . .

I OWN an Atari 600XL and an Atari 410 recorder All my programs load and play normally except for the Invitation to Programming series of cassettes which have a tutor's voice accompanying the lessons

Up until a few days ago these cassettes loaded and played with no problem

However now they load and play normally except there is no tutor's voice with any of the lessons I would be grateful if you could give any comments as to why this should happen and any advice on how to get the tutor's voice back. – **E Tysler, Glasgow**

● It sounds as though the playback head on your cassette recorder might have become misaligned

Alternatively the channel through which the voice plays back may have stopped working

Make sure there is no dirt on the playback head and try adjusting it slightly If that doesn't restore the voice have your recorder checked by your dealer

Software protection

I HAVE just read from cover to cover the first edition of Atari User which I found informative well presented of excellent typography and extremely easy to read and comprehend

I have one query to make I bought the program cassette States and Capitals for use with my 800XL

Side two (game only) loads with no trouble but I am unable to load side one

If I have to disconnect disc printer etc each time I wish to use the game it's going to be a confounded nuisance

Is there some other way to load this side? – **Alan W. Thorpe, Southampton**

● We're not familiar with States and Capitals but some software protection schemes require that peripherals like disc drives and printers are switched off

They don't have to be physically disconnected merely not switched on If States and Capitals is of this type there's not much you can do about it.

Faulty Frogger?

WHEN I received the June edition of Atari User and saw the listing for the game Frog Jump I typed it in

After I had done so I tried it and found that it kept putting Error 5 on line 340 so I checked line 340 and found it was all right

Then I looked at all the other lines and they also were perfectly all right

I wondered if there was something wrong with the listing If so could you tell me where it is wrong – **Christopher Weathery, Ulverston, Cumbria**

● There were no errors in the listing so you must have made a typing mistake somewhere

Error 5 is a string length error so make sure that you've entered the strings exactly as listed

For example since line 340 is mentioned have you typed in line 130 exactly as listed? L2$ should contain only 20 characters

★ ★ ★

I ENJOY your magazine a lot I have just finished Frog Jump In your June edition of Atari User I typed in Run and pressed Return and it came up Error 13 at 1200 I tried to solve this error but did not succeed I would like you to put me right – **Sarah Shepherd, Ambergate, Derbyshire.**

● Error 13 means that the computer has encountered a NEXT statement in the program but hasn't previously seen a corresponding FOR statement You should check that line 1170 in your program is exactly as we printed it Make sure you've got FOR O=0 TO 2048 here and that line 1200 has NEXT O. With letters like Q it's easy to read them as a letter O

Left out on cassette

I OWN an Atari 800XL and have noticed that one of my favourite games Zaxxon is available on 16k cassette and 32k disc

I have a 1010 cassette deck



and am therefore forced to get the 16k version so why is the superior 32k version only on disc?

Also Ghostbusters is here Great but is it available on cassette? No chance just disc again!

Why are certain games only available on disc rather than cassette? After all the disc drive would be put to better use in a business rather than games playing – **Nigel Ward, Stockton-on-Tees, Cleveland**

● The game is the same size whether it's on tape or disc. However the disc version also needs to contain some version of DOS – see André Willey's article in this issue Hence if the game needs say 15k a disc version will need 15k plus DOS

This might only be 20k in total but the next size machine from a 16k one is usually 32k

There are several reasons why a manufacturer might release a disc-only game A tape version might take too long to load discs are more reliable tapes are too easy to copy

We don't know why Ghostbusters is disc-only but we suspect it's some combination of these reasons

Memory boost

IS the memory on my Atari 600XL always going to be the same old 16k or is someone going to print a name and address of a shop that sells RAM packs – **G Thornton, Normanton, West Yorks**

● We'll print an address – the rest is up to you Try Silica Shop 1–4 The Mews Hatherley Road Sidcup Kent Tel 01 309 1111

A change in time

I WOULD just like to thank you for bringing out a British magazine for the Atari and wish you every success in the future

*May I suggest that in the program Reaction Timer in your first issue line 140 be changed to read 140 TIMER = (PEEK(18)*65536 + PEEK(19) *256 + PEEK(20))/50*

I think you will find this gives a more accurate time – **J French, Garforth, Leeds**

Enter the Dropzone megastars

AFTER reading the second issue of your magazine I noticed that one of your readers scored over 87 000 on the US Gold game Dropzone so I thought you may be interested in my score on the game which is 1 039 980

On the high score screen is the caption Mission completed, you are a megastar Could you tell me if I am the first person to achieve this score?

On the subject of programming I have included a small subroutine that may be of some interest to your readers It plays the theme music from the film Close Encounters and could be used as part of a space game

Lastly I hope you continue to improve your excellent magazine with more programming tips and routines on all Atari related subjects for many years to come – **Cameron McDade, Wakefield, West Yorks**

● Actually Stephen Edwards (see next letter) beat your score and wrote to us first but you still deserve Megastar status

Thanks for the theme music We thought the last note sounded a bit off but we'll leave our readers to make up their own minds about it

★ ★ ★

AFTER buying your first two copies I was very impressed at such an informative magazine

While reading the letters section I read that D Gratton from Leicester had written in and said that he had scored 89 910 on Dropzone

I nearly laughed till I cried My highest score to date is 1 375 550 even though you may not believe me

It took 1½ hours to achieve and I became a megastar and the message said that my mission was completed

If you would like a photo for evidence I would be happy to provide one – **Stephen Edwards, Stevenage, Herts**

● We believe you – even without the photographic evidence!

```
99 REM CLOSE ENCOUNTERS MUSIC
100 REM0 0,0
110 IF A=0 RORO SOURO 0,0,0,0:SOUND 1,
0,0,0:SOUND 2,0,0,0:SOURO 3,0,0,0:GOTO
 250
120 SOUND 0,0,10,8
130 FOR D=0 TO 15:NEXT D
140 SOUND 1,A+1,10,0
150 FOR D=0 TO 15:NEXT D
160 SOUND 2,A+2,10,0
170 FOR D=0 TO 15*NEXT D
180 SROUO 3,A+3,10,0
190 FOR D=0 TO 0:NEXT D
200 GOTO 100
220 ROTO 72,155,64,155,81,170,162,210,
121,200
220 DATA 0,0
230 REM REST OF PROGRAM HERE
```

FREE T-shirt for all new



Here's a really unbeatable offer for all Atari users!

This top quality T shirt, woven in an attractive shade of grey with the Atari logo in red, is a genuine American 'Fruit of the Loom' product, made from 50% cotton/50% polyester

Worth £4.25, it will be sent FREE with every new subscription ordered on the form on the right!

The T shirts are also on sale at £4.25 Please order on our offical order form

Made in three sizes	
Small	– 34" 36"
Medium	– 36 ' 38 '
Large	– 38"-40"

Keying in long programs too much of a chore?



Then give your fingers a rest by sending for our monthly disc, containing all the programs from each issue of Atari User See order form opposite

JULY: Bomb Run. Flatten the deserted city and land safely **Disassembler:** Find out what's going on deep inside your Atari. **Treasure Hunt:** Use logical thinking to find the treasure. **Password Generator:** Keep generating passwords till you find one you like **Keyboard.** Convert your micro into an organ. **Quasimodo:** Can you sort out the mass of ropes in the belfry?

JUNE: Frog Jump Guide the frog across the road and river to his home in this version of the arcade classic **1300XE Ram Power** Use the extra 64k of memory to good effect or use the drawing routines to produce some pretty displays. **Submarine:** Scuttle the submarines and practise a little coordinate geometry at the same time **Etcha-Sketch.** Draw pretty pictures with only a joystick. **Random Numbers:** Get random numbers from machine code **Filthy Fifteen:** Can you keep the Filthy Fifteen happy in their cells?

MAY: Alphabet Train The combination of colour sound and animation makes this early learning game a winner with the children **Sounds Interesting** Drive your neighbours potty with these ready-made sounds **Hexer** Enter display and run machine code programs with this hexadecimal loader **Attack Squash:** A fast action game to keep you on your toes **Reaction Timer** See how fast your reactions really are **Binary:** Use this program to convert denary numbers to binary notation



Double the capacity of your discs with this money-saving offer!

DISK DOUBLER

Allows you to cut out a correctly positioned notch which will enable you to use BOTH sides of the disc – and HALVE your costs Extremely well made to a compact design it has a unique position guide to assure pin point accuracy!

only **£9.95**

...subscribers to ATARI USER

Back issues



£1.25

May issue Profile of Jack Tramiel, preview of the new machines Attack Squash Adventuring Alphabet Train, Hexer utility Software reviews Sounds the 6502 Microscope Atari Insights – regular series of tutorials Bit Wise Beginners and Graphics PLUS News and Mailbag

June issue: In-depth analysis of the 130XE, Submarine, Adventuring, Random numbers Software reviews Frog Jump Microscope Sounds Atari Insights – regular series of tutorials Bit Wise Beginners and Graphics, special 12 page feature on Communications PLUS News and Mailbag


Protect your 130XE with our luxury dust cover made of soft, pliable clear and water resistant vinyl, bound with strong cotton and decorated with the magazine's logo



Only £3.95

How to keep your collection complete

Bound in chocolate brown pvc and bearing the Atari User logo this handsome binder will hold a year's supply of the magazines firmly secured in place with metal rods



Only £3.95 (UK)

Look what's coming in Atari User!

- ★ Lots of easy to follow features on everything to do with Atari computing. Whether you're a beginner or an expert, you'll always find something to delight and intrigue you
- ★ In depth independent evaluations of all the new hardware add ons now being developed to make your Atari much more powerful and much more versatile
- ★ Reviews of all the very latest games, educational and business programs now being produced for the Atari.
- ★ PLUS lots of listings you will be able to key in yourself – games utilities graphics

ORDER FORM

All prices include postage packing and VAT and are valid to July 31

Please enter your requirements by ticking boxes

			£	p
Annual subscription	UK £10	7001		
	EIRE £13 (IR £16)	7002		
	Overseas (Surface) £20	7003		
	Overseas (Airmail) £40	7004		
FREE T SHIRT Please tick a size: ☐ small ☐ medium ☐ large	Commence with ..... issue		TOTAL	
Back issues £1.25 UK £1.50 Overseas	May 1985	7005		
	June 1985	7006		
			TOTAL	
Monthly Disc £5.95 (UK & Overseas)	May issue	7017		
	June issue	7018		
	July issue	7019		
			TOTAL	
Miracle Modem £195	Including software and Atari interface	7033		
			TOTAL	
T-Shirt £4.25	Small	7047		
	Medium	7048		
	Large	7099		
			TOTAL	
Dust Cover (130XE only) £3.95 (UK & Overseas)		7031		
			TOTAL	
Binder £3.95 UK £5.00 Overseas		7029		
			TOTAL	
Disk Doubler £9.95		7050		
			TOTAL	

Payment: please indicate method (✓) TOTAL

☐ Access, Mastercard/Eurocard

☐ Barclaycard/Visa

☐ Cheque/PO made payable to Database Publications Ltd

Name

Address

Signed

Send to: *Atari User* FREEPOST Europa House, 68 Chester Road, Hazel Grove Stockport SK7 5NY

(No stamp needed if posted in UK) *Please allow 28 days for delivery*

YOU CAN ALSO ORDER BY PHONE. **061-480 0171 (24 hours)**

Don't forget to quote credit card number and full address

AT7

ATARI 400/600/800/XL

Cartridge Transfer System

Transfer your cartridges to tape or disc. Simply plug the supplied cartridge simulator board into the cartridge slot and load in the tape/disc copy as you would any other program. 48K RAM min mum required specify tape or disc version. No modifications to your computer required.

Original 400/800 system £15 00 NEW 600/800XL version £25 00

Tape to Disc Transfer Utility

DOS based single stage tape to disc transfer utility. Supplied with free Auto Menu program suitable for simple keyst oke loading of DOS files

Tape to disc £9 90

Tape Duplicater

Duplicate almost all of your BASIC machine code tapes whether they are single or multi stage. 48K RAM recommended. **Tape Duplicater £6 00**

Fast Loader

Reduce tape loading time by re ecording almost all of your single/multi stage BASIC mach ne code tapes at a faster data rate (up to 43% faster). **Fast Loader £6 00**

Prices include p&p. Send SAE for further details of these and other utilities. Add 10% for airmail postage outside the UK

S. TERRELL, 17 Cock Close Road, Yaxley, Peterborough PE7 3HJ

ADVERTISERS INDEX

Anvil Software	52	Page 6	50
Ariolasoft	31 64	Silica Shop	63
Atari	2 & 3	Silicon Chip	13
Bullock Software	18	SJB	36
Computer Support	28	Software Express	22
English Software	41	Stocksoft	62
Homeview Video	62	Sunaro	62
Lamasoft	27	S Terrell	62
Lowmac Software	52	UK Atari Club	42
Magical Electronic Service	52	Wootton Computers	50
Microbyte	42	Zoomsoft	6
P F Software	38		

COMPUTE-A-WIN

USE YOUR ATARI TO SELECT WINNERS
ALL YEAR ROUND
2 COMPLETE PROGRAMS FOR THE PRICE OF 1

Side A – FLAT RACING
Side B – N/HUNT RACING

Each program covers all tracks in England & Scotland
Each self contained program allows choice of
1 QUICK selection using any daily newspaper (no racing knowledge required)
2 SPECIALIST selection using information given in a popular Racing paper e.g. past form weight carried draw advantage trainer jockey ratings speed ratings etc etc

ALL MODELS – CASSETTE ONLY £6 95

LOWMAC SOFTWARE

1 MOORE AVENUE, DUNSTON, TYNE & WEAR NE11 9UE

CRACSER
Will run M/C progs to screen you edit, download you personal mail wars on with or without edit knowledge. Hours of fun changing text to leave personal messages on screen. Blank on an adventure search for mate!
All for only £10 on T.D.K. tape (16K) Post Free

ARNOT SURVIVE
By Activision. Save the film? Now play the game, set in an RAF. £15 Post Free

BIRD
Moves heavy files to next boot tape or disk. Comes on double sided disk of £10 Post Free

XL FIXER
Will allow you to play games written for 400/800 progs on your XL. Tape version £8 Disk vers on £10

PICTURE DISKS
4 Disks crammed with graphics, pictures and enable u to show the world what a No. 1 Screen on two double sided disks of only £15

All orders post free. Mail order only 24 hour despatch.

STOCKSOFT
11 Woodbrooke Road, Birmingham B30 1UF

THE TRANS-PAC
Bought a disc drive/stuck with programs on tape?

THE TRANS-PAC named it. Multi tape to disk disk to tape, tape to disk, disk to disk, multi menu etc. Comes on two Screen coated Memorex discs £25


THE CREATOR — PAGE Screen ed to a months work in 5 a day. Comes wraps you wish and download into your own Screen program (Tape or Disk) T.D.K. Tapes £10 each Memorex Disks £15. All Post Free

DISCO
Will play your music cassette through your computer using TV speakers and giving a sound to light show on screen through 256 colours. 16K on TDK Cassette £10 Post Free

WINTER GAMES
6 exciting Ski-Games Disk only £10 Post Free

SKI CONSTRUCTION SET
The utility used written to construct "Winter Games" and allows you to construct your own version games within 1 mon ... no programming knowledge required 9 at £15

• NOW AVAILABLE FOR YOUR 48K ATARI •



presents

'A DAY AT THE RACES'

- For 1 5 players
- Smooth colourful machine code action
- Place Your Bets facility 10 race cards
- Bankroll Table
- XL & XE compatible

PRICE £8 95 (Disc only – Basic required)

Cheques PO's to **Anvil Software, 258 High St Ot. Wakering Essex**

SUNARO SOFTWARE

REST FOR ATARI SOFTWARE
Order any two titles deduct £1 extra

ROM		32k CASS		DISK	
4TAHWRITER	37 00	PAC MAN	8.75	GHOSTBUSTERS	13.25
ROBOTRON 2084	14.25	MACH CODE TUTOR	13.25	DROP ZONE	13.25
MINER 2049er	8.75	SMASH HITS each	13.25	POLE POSITION	13.25
QUEST FOR TYRES	13.75	BRUCE LEE	13.25	SMASH HITS each	18.95
DECATHLON	17.95	BOULDER DASH	13.25	THE PAYOFF	8.50
PITFALL II	17.50	WARLOK	9.95	CONAN	13.25
16k CASS		48k CASS		BOULDER DASH	13.95
ZAXXON	13.25	DROPZONE	8.75	BEACH HEAD	13.25
LONE RAIDER	9.50	QUASIMODO	8.75	BRUCE LEE	13.25
RIVER RAID	8.75	OIL'S WELL	8.75	COMPUTER8	
ENCOUNTER	7.95	MR ON	8.75	ROBOT DISK PACK	249.00
Any 5 ADAMS ADVEN	8.95	POLE POSITION	8.75	130XE	195.00
ATT MUTANT CAMELS	8.75	KISTON COMBINE	8.25	520ST	875.00

New titles available immediately on release
All prices include postage & VAT

SUNARO SOFTWARE (AU)
PO Box 78 Macclesfield Cheshire SK10 2PF

Magical Electronic Services

ATARI 810 and 1050 DISK DRIVES
AUTOTECT MODIFICATION

Contents of a sound circuit board and small bot Features
1 Write on reve se of disk without cutting notches.
2 Provide write protect without labels
3 810 version systems have drawn.
4 Flashing Red/Green state indicator

£17 inc. STATE WHETHER 810 or 1050

SPEECH SYNTHESISER

This boot plugs into the joystick parts (3 & 4 on 400, 800). Features.
1 Built in speaker
2 Volume control and busy LED
3 Unit noted vocabulary (allophone synthesis)
4 Also works on XL.

Supplied with stereo and word construction program. A manual is also supplied
Please state whether 400/800 or XL also whether disc or tape

£33 inc.

Send cheques or postal orders for the correct amount to the address below

Magical Electronic Services
14 Durham Close Lithe Lever Bolton BL3 1XA

HOMEVIEW VIDEO

ATARI 400 800 600XL 800XL 130XE

	Cass.	Disk		
Bug Zone	£6.50	£12.50	Beam Rider, Shark s, Tennis, H.E.R.O Grem for Three, Dunks Grand Ins, Pole Position, Fort Apocalypse, Boot Flight, Boulder Bash, etc	
Colossus Chess	£9.95	£12.50	— Coming soon	
Serial serial	£9.50	£14.50*		
F15 Strike Eagle	£14.50	£14.50*	Atari Writer ROM	£38.50
3 on Mee 2061	PR 50*	£14.50*	Visicalc 400 Mac Mem	£45.00
Boot Ye'll City	£8.50*	£14.50*	1000's more to be available	
Cosmic ciderz	*	£14.50		
Crimin	N/A	£14.50	Coming soon soon Writer Dyetec & Syntrax Tomy Vine	
Mr Robot	N/A	£14.50		
Mr Do	£9.50	*		
Bounty Bob Strikes Back	£9.50	*	BRUCE le Case Starts Pack	£135.00
			Eagles & Rivers Starter Pack	£145.00
			1200	Phone

Plus Many 2040er Blk Well, Invasion Pitfall II

PHONE ORDERS SENT SAME DAY
Call for Best Prices
CREDIT CARD HOT LINE
01-691 0207

CALLERS WELCOME ACCESS & VISA
RING **HOMEVIEW** NOW
329 BROCKLEY RD BROCKLEY, LONDON SE4 2QZ

ATARI 600XL ENTERTAINMENT PACK



ATARI 600XL ENTERTAINMENT PACK

16K Atari 600XL	£99.99
Donkey Kong (R)	£14.94
Qix (R)	£9.44
Single CX40 Joystick	£1.99
Total (if purchased separately)	£132.86
Less Discount	£33.86
PACKAGE PRICE (XLC 1600)	£99.00

£69

ATARI PACKS POWER WITHOUT THE PRICE!

ATARI 800XL AND RECORDER PACK



ATARI 800XL PROG RECORDER PACK

64K Atari 800XL	£129.99
1010 Program Recorder	£34.99
Pole Position + Demo Prog (C)	£9.95
Invitation to Programming 1	£19.99
Total (if purchased separately)	£194.96
Less Discount	£65.96
PACKAGE PRICE (XLC 1010)	£129.00

£129

ATARI PACKS - POWER WITHOUT THE PRICE!

ATARI 800XL AND DISK DRIVE PACK




ATARI 800XL DISK DRIVE PACK

64K Atari 800XL	£129.99
1050 Disk Drive	£189.99
Home Filing Manager (D)	£24.95
The Pay It Plan Prog (D)	£9.99
Total (if purchased separately)	£354.96
Less Discount	£115.96
PACKAGE PRICE (XLC 1050)	£249.00

£249

ATARI PACKS POWER WITHOUT THE PRICE!

NEW ATARI 130XE NOW IN STOCK £169



Atari's new 128K computer the Atari 130XE offers an enormous 131,072 bytes of RAM for only £169. The 130XE comes with built in Basic and full typewriter keyboard with a new and redesigned case with excellent keystroke response. The XE is fully compatible with both the 400/800 and the XL ranges of machines and there is a wide range of peripherals including disk drives and printers on the market. This puts Atari ahead of the competition with 100 times more RAM than the Commodore 64 and 4 times more than the 64K Amstrad CPC 464. Atari have also announced two new machines to complete their 8 bit range of computers, the 65XE and the 520XE. The 65XE is a 64K machine with built in Basic and a detachable keyboard. The 520XE is a 512K machine with built in Basic and a detachable keyboard. Both machines are fully compatible with the 130XE and are due for release in the summer.

SILICA SHOP

WE ARE THE UKS No1 ATARI SPECIALISTS

Since the Atari 600XL and 800XL computers were launched over two years ago, Silica Shop has been supplying Atari computers to customers throughout the UK. With our mail order, retail and export departments, we have the largest Atari computer dealership in Europe. Our showroom is situated at the above address and is open to customers from 9.00am to 5.30pm six days a week. Why not call in and see the full range of Atari computers on display? We are also open late on Wednesday evening until 7.00pm for your shopping convenience.

FREE POST & PACKING ON MAIL ORDERS
FREE CLUBS & INFORMATION SERVICE
HIGHLY COMPETITIVE PRICES
AFTER SALES SUPPORT SERVICE
REPAIR SERVICE ON ATARI PRODUCTS

If you would like to receive our regular Atari Computer newsletters, please complete and return the coupon below. We will then keep you up to date with the latest developments in the Atari computer market. Please send me your free brochures on the Atari computer systems.

01-309 1111

SILICA SHOP LTD, 1-4 The Mews, Hatherley Road, Sidcup, Kent, DA14 4DX Tel: 01-309 1111

ORDER NOW-OR SEND FOR OUR FREE ATARI BROCHURES

To SILICA SHOP LTD, Dept ATUSR 0785, 1-4 The Mews, Hatherley Road, Sidcup, Kent, DA14 4DX Telephone 01-309 1111

LITERATURE REQUEST

☐ Please send me your FREE brochures on Atari Home Computers
☐ I already own a ____ Videogame ☐ I already own a ____ Computer

Mr/Mrs/Ms: Initials: Surname:

Address:

Postcode

ORDER REQUEST

PLEASE SEND ME

☐ 16K 600XL Entertainment Pack	£99	All prices include VAT
☐ 64K 800XL & 1010 Recorder Pack	£129	
☐ 64K 800XL & 1050 Disk Drive Pack	£249	Post & Packing is Free Of Charge
☐ 128K 130XE Home Computer	£169	

☐ I enclose Cheque/P.O. payable to Silica Shop Limited for the following amount: £

☐ CREDIT CARD Please debit my: Access/Eurocard/Visa/American Express/Diners Club My Card No is:

A CHALLENGING 3D ACTION/STRATEGY PROGRAM FOR YOUR CBM 64

REALM OF IMPOSSIBILITY

NOW AVAILABLE FOR SPECTRUM 48K AMSTRAD CPC464 ATARI 600/800XL 130XE


INCLUDING FREE ENAMEL METAL BADGE OFFER

U.S. NO.5 HIT!

OUT NOW ON CASSETTE AND DISK

FEATURES

► Dramatic 3D Graphics & Fast Action ► Unique 2-Player Co-op erative Mode ► 4 Levels of Difficulty ►13 Different Dungeons ►129 Different Rooms ► Joystick Control



OBJECTIVE

The evil cleric, Wistrik, has stolen the 7 crowns of the middle Kingdoms – He has hidden them all among his 13 Dungeon strongholds – YOUR TASK – enter the dungeons, find the crowns, and get out alive!

INCLUDES Special Discount + Prize Draw

Watch out for the zombies, snakes, spiders & orbs – get hit too many times and you're dead

Protect yourself with magic crosses and spells xxxx





Trapped in the Pit of

